



Model (MM Receiver)	VI960S-DRWC* VI961-DRW* VI962-DRW*	VI760S-DRWC VI761-DRW VI762-DRW	VI560S-DRWC VI561-DRW VI562-DRW	VI460S-DRWC VI461-DRW VI462-DRW
Device Configurations				
Battery size 60S-DRWC	Rechargeable Lithium-Ion			
Battery size 61-DRW	312 Zinc-Air			
Battery size 62-DRW	13 Zinc-Air			
Receiver Options	MM			
Control Options	TapControl (60S-DRWC), Push button (61-DRW and 60S-DRWC), Multi-Function button (62), Telecoil (62)			
IP Classification	IP68			
Audiological Features				
Channels	17	14	12	12
360 All-Around	●	-	-	-
All Access Directionality	-	●	●	-
Binaural Directionality III	-	-	-	●
Intelligent Focus**	●	-	-	-
Clear Focus***	●	-	-	-
Front Focus	-	●	-	-
Ultra Focus	-	-	●	-
M&RIE	●	●	●	●
Autoscope Adaptive Directionality (w/Adjustable Directional Mix)	●	●	●	●
Synchronised Soft Switching	●	●	●	●
Streaming Bass Boost	3 Settings	3 Settings	2 Settings	2 Settings
Environmental Optimizer II	●	-	-	-
Environmental Optimizer I	-	●	●	●
Intelligent Noise Tracker****	3 Settings	-	-	-
Noise Tracker II	5 Settings	4 Settings	3 Settings	2 Settings
Wind Guard	3 Settings	3 Settings	2 Settings	2 Settings
Impulse Noise Reduction	3 Settings	3 Settings	2 Settings	2 Settings
Expansion	3 Settings	3 Settings	2 Settings	2 Settings
Sound Shaper	●	●	●	●
DFS Ultra III (w/Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
Functional Features				
Ear-to-Ear Communication	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS***** and Android™ devices)	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●
ReSound Smart 3D™ app	●	●	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	-	-	-
Remote Fine Tuning and Updates				
ReSound Assist	●	●	●	●
ReSound Assist Live	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Fitting Software ReSound Smart Fit™ 2.1 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Datalogging	●	●	●	●
Wireless fitting with Noahlink Wireless	●	●	●	●
Automatic Receiver Detection	●	●	●	●

* Vix60S-DRWC, Vix61-DRW, and Vix62-DRW models have the capability to change the feature set from the highest level to the other price points for demo purposes

** Intelligent Focus only available for the 60S model

*** Clear Focus only available for the 61 and 62 models

**** Intelligent Noise Tracker only available in the Hear in Noise program of 60S models

***** MFi supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later



Desktop charger
Charging form factor (CFF) 8



Standard charger
Charging form factor (CFF) 8



Premium charger
Charging form factor (CFF) 8



© 2024 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

402946000GB-25.01-Rev.C

Worldwide Headquarters
GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel: +45 4575 1111
resound.com

United Kingdom
GN Hearing UK Ltd.
Unit 13
Talisman Business Centre
Bicester
Oxon OX26 6HR
Tel: +44 1869 352800
resound.com

Australia
GN Hearing Australia Pty Ltd
Suite 1001, Level 1
1 Julius Avenue
North Ryde, NSW 2113
Australia
Tel: (free) 1800 658 955
resound.com



New Zealand
GN Hearing New Zealand Limited
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel: (free) 0800 900 126
resound.com

Technical Specifications

		MM	
		ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	37	dB
Full-on gain (50 dB SPL input)	Max. HFA	61 50	dB
Maximum output (90 dB SPL input)	Max. HFA	115 113	dB SPL
Total harmonic distortion	500 Hz	0.4	%
	800 Hz	0.6	
	1600 Hz	0.4	
Telecoil sensitivity (1 mA/m input)*	Max.	90	dB SPL
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	97	
Full-on telecoil sensitivity @ 1mA/m	HFA	80	
Equivalent input noise, w/o Noise reduction		22	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	9	dB SPL
Frequency range		<200 - >8000	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 61-DRW, 62-DRW)		0.81 / 0.83	mA

* Telecoil is only for the Vlx62-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.

Patents pending.

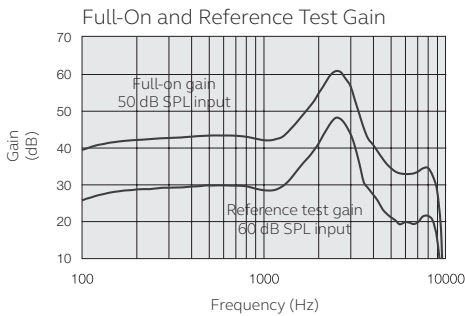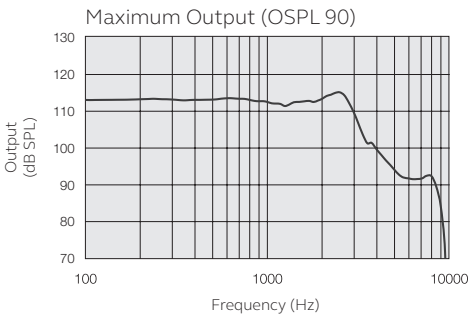

All specifications are subject to change without notice.

