

ReSound Sensia™ Bimodal



SNB60S-DRWC

Model (Standard Receiver)	SNB960S-DRWC	SNB560S-DRWC
Device Configurations		
Battery size	Rechargeable Lithium-Ion	
Receiver Options	LP, MP, HP, UP	
Control Options	TapControl and Push button	
IP Classification	IP68	
Audiological Features		
Channels	17	12
Intelligent All-Around*	●	-
360 All-Around*	●	-
All Access Directionality*	-	●
Intelligent Focus*	●	-
Front Focus*	-	●
Spatial Sense*	●	●
Autoscope Adaptive Directionality (w/Adjustable Directional Mix)	●	●
Synchronised Soft Switching*	●	●
Streaming Bass Boost	3 Settings	2 Settings
Environmental Optimizer II	●	-
Environmental Optimizer I	-	●
Intelligent Noise Tracker*	3 Settings	-
Noise Tracker II	5 Settings	3 Settings
Wind Guard	3 Settings	2 Settings
Impulse Noise Reduction	3 Settings	2 Settings
Expansion	3 Settings	2 Settings
Sound Shaper	●	●
DFS Ultra III (w/Music Mode)	●	●
Synchronised Acceptance Manager*	●	●
Tinnitus Sound Generator	●	●
Functional Features		
Ear-to-Ear Communication*	●	●
Bluetooth® Auracast™**	●	●
Direct audio streaming (compatible iOS*** and Android™ devices)	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●
ReSound Smart 3D™ app	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	-
Remote Fine Tuning and Updates		
ReSound Assist	●	●
ReSound Assist Live	●	●
Remote Firmware Updates	●	●
Fitting Features		
Fitting Software ReSound Smart Fit™ 2.4 or higher	●	●
Fully Flexible Programs	4	4
Datalogging	●	●
Wireless fitting with Noahlink Wireless	●	●
Automatic Receiver Detection	●	●

* Not available in a bimodal fitting.
** Auracast broadcasts will only stream monaurally to the hearing aid in a bimodal fitting.
*** Hands-free calls are compatible with iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation), iPad (10th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later.
Handsfree calls are not available once the device has been linked as part of a bimodal fitting.



Desktop charger
Charging form factor (CFF) 8



Standard charger
Charging form factor (CFF) 8



Premium charger
Charging form factor (CFF) 8



© 2026 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Android, Google Play and the Google Play logo are trademarks of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The Auracast word mark and logos are trademarks owned by Bluetooth SIG, Inc.

Worldwide Headquarters
GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel: +45 4575 1111
resound.com

CVR no. 55082715

United Kingdom
GN Hearing UK Ltd.
Unit 13
Talisman Business Centre
Bicester
Oxon OX26 6HR
Tel: +44 1869 352800
resound.com

Australia
GN Hearing Australia Pty Ltd
Suite 1001, Level 1
1 Julius Avenue
North Ryde, NSW 2113
Tel: (free) 1800 658 955
gnhearing.com/en-au/

New Zealand
GN Hearing New Zealand Limited
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel: (free) 0800 900 126
gnhearing.com/en-nz/

Technical Specifications

		LP	MP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	31	36	dB
Full-on gain (50 dB SPL input)	Max. HFA	56 50	60 55	dB
Maximum output (90 dB SPL input)	Max. HFA	113 109	115 113	dB SPL
Total harmonic distortion	500 Hz	0.6	0.7	%
	800 Hz	0.8	0.9	
	1600 Hz	1.4	1.3	
	3200 Hz	0.6	0.6	
Equivalent input noise, w/o Noise reduction	HFA	22	20	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	8	9	dB SPL
Frequency range		≤200 - ≥8000	≤200 - ≥8000	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours



* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.

Technical Specifications


		HP	UP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	41	46	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	71 65	dB
Maximum output (90 dB SPL input)	Max. HFA	120 118	129 123	dB SPL
Total harmonic distortion	500 Hz	0.5	0.5	%
	800 Hz	0.8	0.4	
	1600 Hz	0.8	0.1	
	3200 Hz	0.4	0.1	
Equivalent input noise, w/o Noise reduction	HFA	21	20	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	9	8	dB SPL
Frequency range		≤200 - 6590	≤200 - 4650	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.

Patents pending.

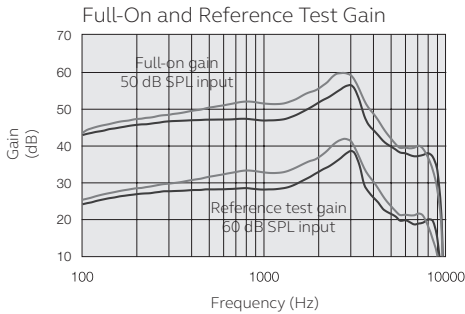
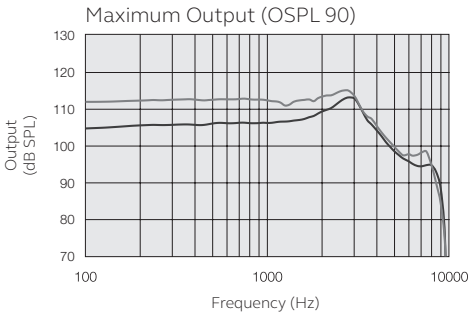


■ LP
■ MP

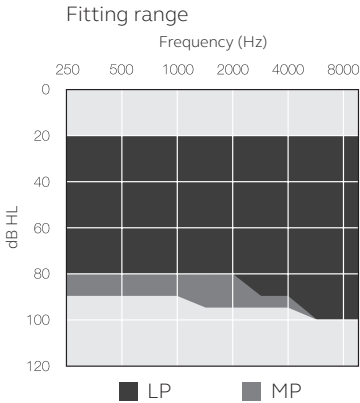


All specifications are subject to change without notice.

Patents pending.

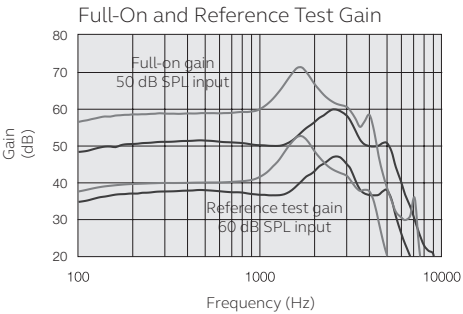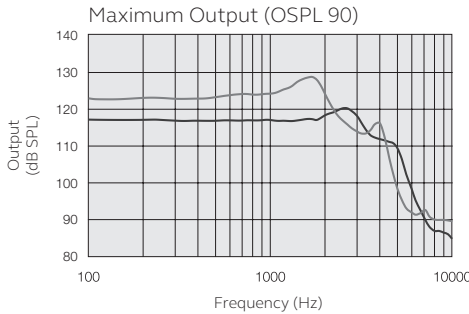

■ HP
■ UP

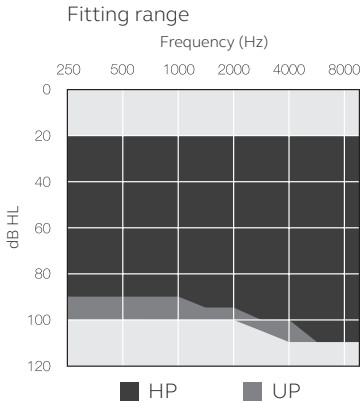

All specifications are subject to change without notice.