



ITC

Model*	SN9ITC-DWC	SN7ITC-DWC	SN5ITC-DWC	SN4ITC-DWC
Device Configurations				
Battery	Rechargeable Lithium-Ion			
Control options	Push button			
Receiver options	LP, MP, HP, UP			
IP Classification	IP68			
Audiological Features				
Channels	17	14	12	12
360 All-Around	●	●	–	–
All Access Directionality	–	–	●	–
Binaural Directionality III	–	–	–	●
Spatial Sense	●	●	●	●
Clear Focus	●	●	–	–
Front Focus	–	–	●	–
Ultra Focus	–	–	–	●
Synchronised Soft Switching	●	●	●	●
Streaming Bass Boost	3 settings	3 settings	2 settings	2 settings
Environmental Optimiser II	●	–	–	–
Environmental Optimiser I	–	●	●	●
Noise Tracker II	5 settings	4 settings	3 settings	2 settings
Expansion	3 settings	3 settings	2 settings	2 settings
Impulse Noise Reduction	3 settings	3 settings	2 settings	2 settings
Wind Guard	3 settings	3 settings	2 settings	2 settings
Sound Shaper	●	●	●	●
DFS Ultra III (w/ Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Low Frequency Boost**	●	●	●	●
Amplification Strategy (WDRC/Semi-Linear/Linear)**	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
Functional Features				
Ear to Ear Communication	●	●	●	●
MultiConnect	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS*** and Android™ devices)	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●
ReSound Smart 3D™ app	●	●	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	–	–	–
Remote Fine Tuning and Updates				
ReSound Assist	●	●	●	●
ReSound Assist Live	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Fitting Software ReSound Smart Fit™ 2.4 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Auto DFS	●	●	●	●
Datalogging	●	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●	●

* Availability of models may vary by country.
** Only available for UP receiver.
*** MFi supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation), iPad (10th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later.



Custom charger
Charging form factor (CFF) Custom (C)



© 2026 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
Android is a trademark of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.
The Auracast word mark is a trademark owned by Bluetooth SIG, Inc.

403073000GB-26.08-Rev.C

Worldwide Headquarters
GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com
CVR no. 55082715

United Kingdom
GN Hearing UK Ltd.
Unit 13
Talisman Business Centre
Bicester
Oxon OX26 6HR
Tel: +44 1869 352800
resound.com

Australia
GN Hearing Australia Pty Ltd
Suite 1001, Level 1
1 Julius Avenue
North Ryde, NSW 2113
Tel.: (free) 1800 658 955
www.gnhearing.com/en-au/

New Zealand
GN Hearing New Zealand Limited
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel.: (free) 0800 900 126
www.gnhearing.com/en-nz/



Technical Specifications

		LP	MP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	33	38	dB
Full-on gain (50 dB SPL input)	Max. HFA	40 38	50 45	dB
Maximum output (90 dB SPL input)	Max. HFA	114 109	118 114	dB SPL
Total harmonic distortion	500 Hz	0.3	0.5	%
	800 Hz	0.4	0.6	
	1600 Hz	0.5	0.8	
	3200 Hz	0.2	0.3	
Equivalent input noise		21	22	dB SPL
Frequency range		≤200 - ≥8000	≤200 - ≥8000	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours


* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.

Patents pending.

All specifications are subject to change without notice.

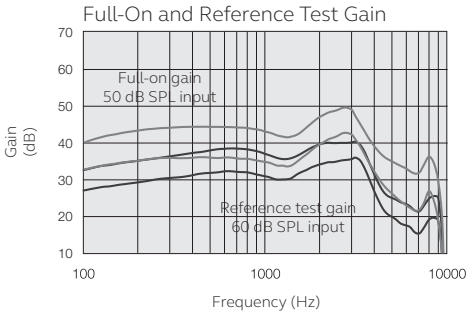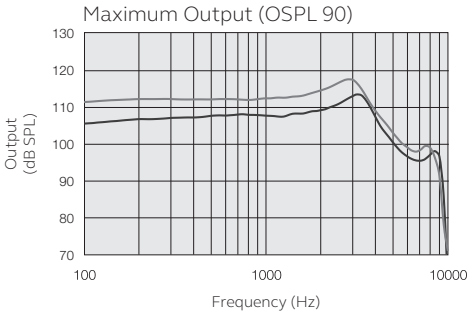

■ LP
■ MP

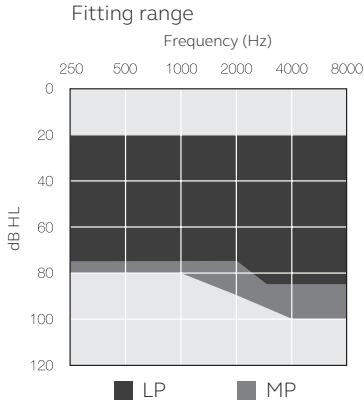

■ LP
■ MP



Technical Specifications

		HP	UP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	41	48	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	70 63	dB
Maximum output (90 dB SPL input)	Max. HFA	121 119	130 125	dB SPL
Total harmonic distortion	500 Hz	0.5	0.6	%
	800 Hz	0.6	0.6	
	1600 Hz	0.8	0.2	
	3200 Hz	0.2	0.1	
Equivalent input noise		23	21	dB SPL
Frequency range		≤200 - 7740	≤200 - 5770	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours


* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.

Patents pending.

All specifications are subject to change without notice.

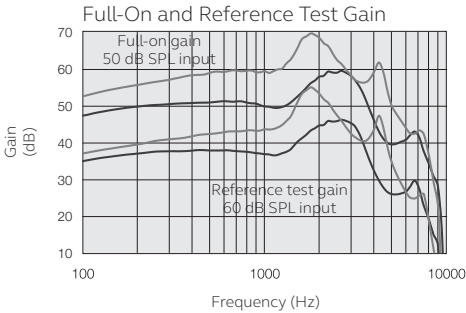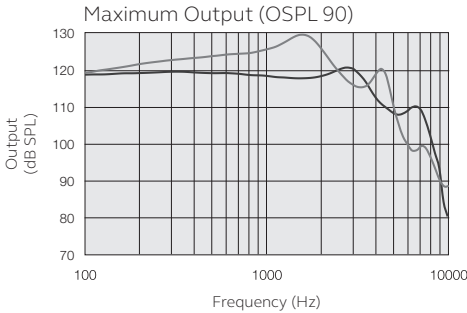

■ HP
■ UP

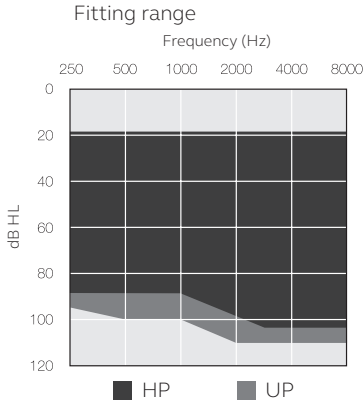

■ HP
■ UP