Beltone **Commence™**



COM62-DRWC COM63-DRW COM64-DRW

Model (Standard Receiver)	COM462-DRWC* COM463-DRW* COM464-DRW*	COM362-DRWC COM363-DRW COM364-DRW	COM263-DRW COM264-DRW
Device Configurations			
Battery size 62-DRWC	Rechargeable Lithium-Ion		
Battery size 63-DRW	312 Zinc-Air		
Battery size 64-DRW	13 Zinc-Air		
Receiver Options	LP, MP, HP, UP		
Control Options	Push button (63-DRW and 62-DRWC), Multi-Function button (64), Telecoil (64)		
IP Classification	IP68		
Audiological Features			
Channels	12	12	10
CrossLink Directionality 2	●	-	-
Personal Sound ID	●	-	-
Smart Beam Steering (w/Adjustable Mixing Point Frequency)	●	●	-
Synchronised Speech Spotter Basic	●	●	●
Streaming Bass Boost	2 Settings	1 Setting	1 Setting
Fixed Directionality	●	●	●
Smart Gain	●	-	-
Sound Cleaner	2 Settings	1 Setting	1 Setting
Wind Noise Reduction	2 Settings	1 Setting	1 Setting
Impulse Noise Reduction	2 Settings	1 Setting	-
Silencer	2 Settings	1 Setting	1 Setting
Sound Shifter	●	●	●
Feedback Eraser 2**	●	●	●
Synchronised SATISFY	●	●	●
Tinnitus Breaker Pro	●	●	●
Functional Features			
Ear-to-Ear Communication	●	●	●
Bluetooth® Auracast™	●	●	●
Direct audio streaming (compatible iOS*** and Android™ devices)	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●
Beltone HearMax™ app	●	●	●
Remote Fine Tuning and Updates			
Remote Fine Tuning	●	●	●
Beltone Remote Care Live	●	●	●
Remote Firmware Updates	●	●	●
Fitting Features			
Beltone Solux Max™ 2.1 or higher	●	●	●
Fully Flexible Programs	4	4	4
Datalogging	●	●	●
Wireless fitting with Noahlink Wireless	●	●	●
Automatic Receiver Detection	●	●	●

* COMX62-DRWC, COMX63-DRW, and COMX64-DRW models have the capability to change the feature set from the highest level to the other price points for demo purposes

** Music Mode only available in Commence 4

*** MFi supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later



Desktop charger
Charging form factor (CFF) 9



Premium charger
Charging form factor (CFF) 9

Made for iPhone | iPad | iPod

Works with Android

© 2026 GN Hearing A/S. All rights reserved. Beltone is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
Android is a trademark of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

40293900GB-26.02-Rev.E

Worldwide Headquarters
GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup,
Denmark
Tel.: +45 45 75 11 11
beltone.com

CVR no. 55082715

Australia
GN Hearing Australia Pty Ltd
Suite 1001, Level 1
1 Julius Avenue
North Ryde, NSW 2113
Tel.: (free) 1800 658 955
www.gnhearing.com/en-au/

New Zealand
GN Hearing New Zealand Limited
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel.: (free) 0800 900 126
www.gnhearing.com/en-nz/

Technical Specifications


		LP	MP	
		ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	31	36	dB
Full-on gain (50 dB SPL input)	Max. HFA	56 50	60 55	dB
Maximum output (90 dB SPL input)	Max. HFA	113 109	115 113	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.6 0.8 1.4	0.7 0.9 1.3	%
Telecoil sensitivity (10 mA/m input)* HFA - SPLIV @ 31.6 mA/m (ANSI) Full-on telecoil sensitivity @ 1mA/m	Max. HFA HFA	107 92 81	110 97 86	dB SPL
Equivalent input noise, w/o Noise reduction 1/3 Octave Equivalent input noise, w/o Noise reduction	 1600 Hz	22 8	20 9	dB SPL dB SPL
Frequency range		<200 - >8000	<200 - >8000	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 63-DRW, 64-DRW)		0.81 / 1.03	0.81 / 0.92	mA

* Telecoil is only for the COMX64-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

All specifications are subject to change without notice.

Maximum Output (OSPL 90)

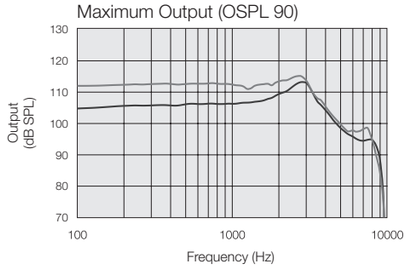


Full-On and Reference Test Gain

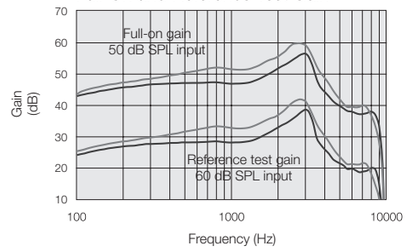


LP
MP

Full-On Telecoil Response*
Input level 10 mA/m

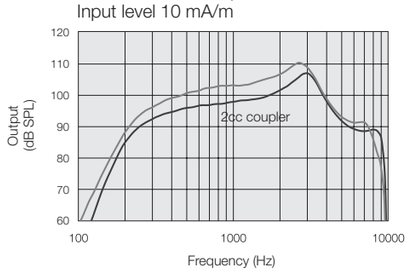

Fitting range



Technical Specifications


		HP	UP	
		ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	41	46	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	71 65	dB
Maximum output (90 dB SPL input)	Max. HFA	120 118	129 123	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.5 0.8 0.8	0.5 0.4 0.1	%
Telecoil sensitivity (10 mA/m input)* HFA - SPLIV @ 31.6 mA/m (ANSI) Full-on telecoil sensitivity @ 1mA/m	Max. HFA HFA	112 103 86	122 106 95	dB SPL
Equivalent input noise, w/o Noise reduction 1/3 Octave Equivalent input noise, w/o Noise reduction	 1600 Hz	21 9	20 8	dB SPL dB SPL
Frequency range		<200 - 6590	<200 - 4650	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 63-DRW, 64-DRW)		0.81 / 0.94	0.81 / 0.87	mA

* Telecoil is only for the COMX64-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

All specifications are subject to change without notice.

Maximum Output (OSPL 90)

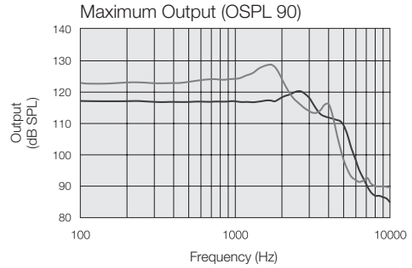


Full-On and Reference Test Gain

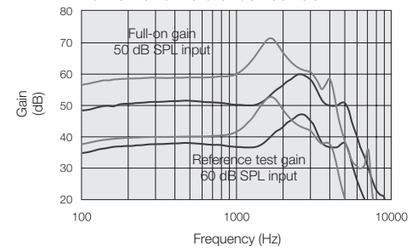

HP
UP

Full-On Telecoil Response*
Input level 10 mA/m

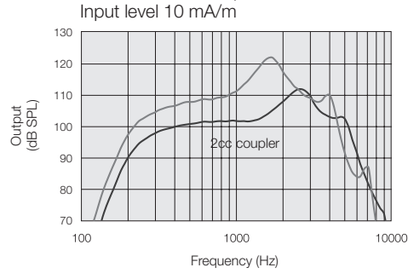

Fitting range

