Beltone **Illuminate™**



ILU62S-DRWC ILU63-DRW ILU64-DRW

Model (Standard Receiver)	ILU1762S-DRWC* ILU1763-DRW* ILU1764-DRW*	ILU962S-DRWC ILU963-DRW ILU964-DRW	ILU662S-DRWC ILU663-DRW ILU664-DRW	ILU462S-DRWC ILU463-DRW ILU464-DRW
Device Configurations				
Battery size 62S-DRWC	Rechargeable Lithium-Ion			
Battery size 63-DRW	312 Zinc-Air			
Battery size 64-DRW	13 Zinc-Air			
Receiver Options	LP, MP, HP, UP			
Control Options	TapControl (62S-DRWC), Push button (63-DRW and 62S-DRWC), Multi-Function button (64), Telecoil (64)			
IP Classification	IP68			
Audiological Features				
Channels	17	14	12	12
True Directionality**	●	-	-	-
CrossLink Directionality 4	●	●	-	-
CrossLink Directionality 3	-	-	●	-
CrossLink Directionality 2	-	-	-	●
True Focus**	●	●	-	-
Clear Focus***	●	●	-	-
Ultra Focus 2	-	-	●	-
Ultra Focus	-	-	-	●
Personal Sound ID	●	●	●	●
Smart Beam Steering (w/Adjustable Mixing Point Frequency)	●	●	●	●
Synchronised Speech Spotter Pro	●	●	●	●
Streaming Bass Boost	3 Settings	3 Settings	2 Settings	2 Settings
Smart Gain Pro	●	-	-	-
Smart Gain	-	●	●	●
True Noise Reduction**	3 Settings	On/Off	-	-
Sound Cleaner Pro	5 Settings	4 Settings	3 Settings	2 Settings
Wind Noise Reduction	3 Settings	3 Settings	2 Settings	2 Settings
Impulse Noise Reduction	3 Settings	3 Settings	2 Settings	2 Settings
Silencer	3 Settings	3 Settings	2 Settings	2 Settings
Sound Shifter	●	●	●	●
Feedback Eraser 2 (w/ AFX Music Mode)	●	●	●	●
Synchronised SATISFY	●	●	●	●
Tinnitus Breaker Pro	●	●	●	●
Functional Features				
Ear-to-Ear Communication	●	●	●	●
MultiConnect**	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS**** and Android™ devices)	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●
Beltone HearMax™ app	●	●	●	●
Sound Enhancer (Beltone HearMax™ app)	●	–	–	–
Remote Fine Tuning and Updates				
Remote Fine Tuning	●	●	●	●
Beltone Remote Care Live	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Beltone Solux Max™ 2.4 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Datalogging	●	●	●	●
Wireless fitting with Noahlink Wireless	●	●	●	●
Automatic Receiver Detection	●	●	●	●

* ILUX62S-DRWC, ILUX63-DRW, and ILUX64-DRW models have the capability to change the feature set from the highest level to the other price points for demo purposes

** True Directionality, True Focus, True Noise Reduction and MultiConnect are only available in the 62S model

*** Clear Focus only available for the 63 and 64 models


**** Hands-free calls are compatible with iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation), iPad (10th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later



Desktop charger
Charging form factor (CFF) 8



Standard charger
Charging form factor (CFF) 8

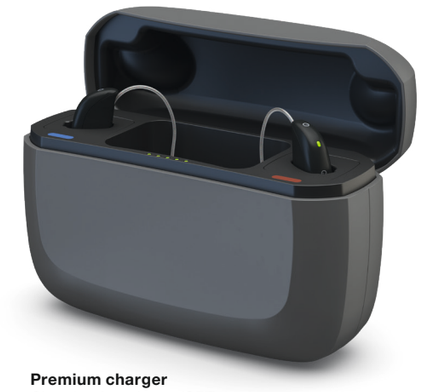

Premium charger
Charging form factor (CFF) 8

Made for iPhone | iPad Works with Android

© 2026 GN Hearing A/S. All rights reserved. Beltone is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Android, Google Play and the Google Play logo are trademarks of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The Auracast word mark and logos are trademarks owned by Bluetooth SIG, Inc.

403400000GB-26.03-Rev.A

Worldwide Headquarters
GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup,
Denmark
Tel.: +45 45 75 11 11
beltone.com

CVR no. 55082715

Australia
GN Hearing Australia Pty Ltd
Suite 1001, Level 1
1 Julius Avenue
North Ryde, NSW 2113
Australia
Tel.: (free) 1800 658 955
beltone.com

New Zealand
GN Hearing New Zealand Limited
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel.: (free) 0800 900 126
beltone.com

Technical Specifications


		LP	MP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	31	36	dB
Full-on gain (50 dB SPL input)	Max. HFA	56 50	60 55	dB
Maximum output (90 dB SPL input)	Max. HFA	113 109	115 113	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.6 0.8 1.4 0.6	0.7 0.9 1.3 0.6	%
Full-on SPLIV @ 10mA/m*	Max.	107	110	dB SPL
HFA - SPLIV @ 31.6 mA/m	HFA	92	97	
Full-on HFA-SPLIV @ 10mA/m	HFA	101	106	
Equivalent input noise, w/o Noise reduction	HFA	22	20	dB SPL
Frequency range		≤200 - ≥8000	≤200 - ≥8000	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 63-DRW, 64-DRW)		0.81 / 1.03	0.81 / 0.92	mA

* Telecoil is only for the ILUx64-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

All specifications are subject to change without notice.

Maximum Output (OSPL 90)

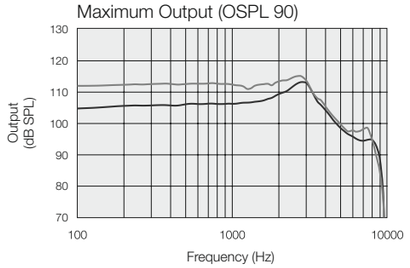


Full-On and Reference Test Gain

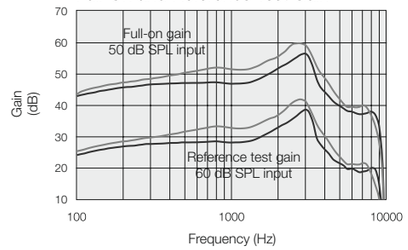


LP
MP

Full-On Telecoil Response*
Input level 10 mA/m

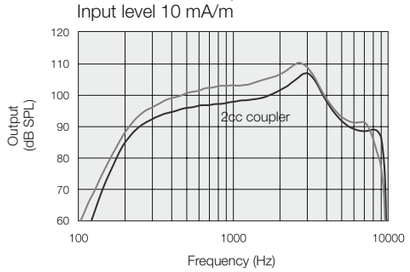

Fitting range



* Telecoil is only for the ILUx64-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.

Technical Specifications


		HP	UP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	41	46	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	71 65	dB
Maximum output (90 dB SPL input)	Max. HFA	120 118	129 123	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.5 0.8 0.8 0.4	0.5 0.4 0.1 0.1	%
Full-on SPLIV @ 10mA/m*	Max.	112	122	dB SPL
HFA - SPLIV @ 31.6 mA/m	HFA	103	106	
Full-on HFA-SPLIV @ 10mA/m	HFA	106	115	
Equivalent input noise, w/o Noise reduction	HFA	21	20	dB SPL
Frequency range		≤200 - 6590	≤200 - 4650	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 63-DRW, 64-DRW)		0.81 / 0.94	0.81 / 0.87	mA

* Telecoil is only for the ILUx64-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

All specifications are subject to change without notice.

Maximum Output (OSPL 90)

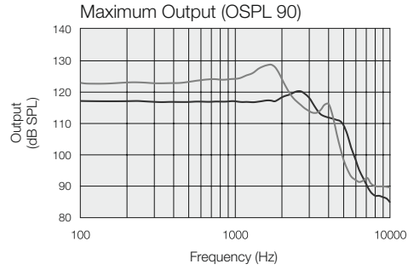


Full-On and Reference Test Gain

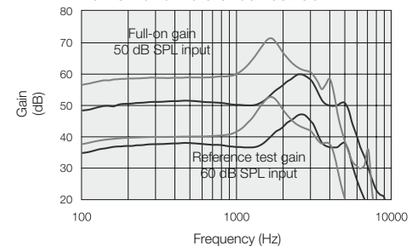

HP
UP

Full-On Telecoil Response*
Input level 10 mA/m

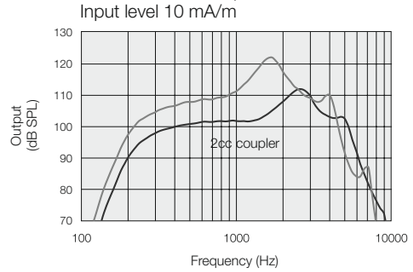

Fitting range

