Beltone **Illuminate**™

CROS Transmitter




Model	ILU062S-DRWC
Device Configurations	
Battery size	Rechargeable Lithium-Ion
Receiver Options	LP, MP, HP
Control Options	Push button
IP Classification	IP68
Battery Lifetime (CROS/BiCROS fitting)	16 (typ) hours
Audiological Features	
Speech Spotter	●
Smart Beam	●
Fixed Directionality	●
Omni	●
Noise Reduction Settings	Paired hearing aid options
CROS balance control	●
Connectivity Features	
Wireless accessory and direct streaming	Paired hearing aid options
Wireless fitting with NoahLink Wireless	●



Desktop charger
Charging form factor (CFF) 8



Standard charger
Charging form factor (CFF) 8

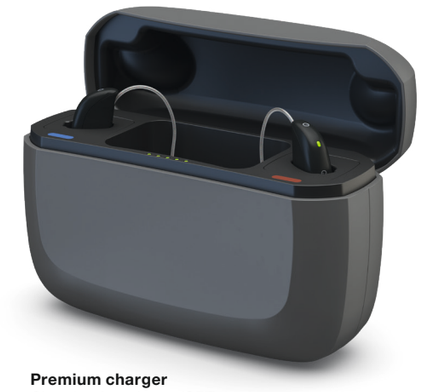

Premium charger
Charging form factor (CFF) 8

© 2026 GN Hearing A/S. All rights reserved. Beltone is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Android, Google Play and the Google Play logo are trademarks of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The Auracast word mark and logos are trademarks owned by Bluetooth SIG, Inc.

403402000GB-26.03-Rev.A

Worldwide Headquarters
GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup,
Denmark
Tel.: +45 45 75 11 11
beltone.com

CVR no. 55082715

Australia
GN Hearing Australia Pty Ltd
Suite 1001, Level 1
1 Julius Avenue
North Ryde, NSW 2113
Australia
Tel.: (free) 1800 658 955
beltone.com

New Zealand
GN Hearing New Zealand Limited
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel.: (free) 0800 900 126
beltone.com

Technical Specifications


		LP ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	MP ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	31	36	dB
Full-on gain (50 dB SPL input)	Max. HFA	56 50	60 55	dB
Maximum output (90 dB SPL input)	Max. HFA	113 109	115 113	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.6 0.8 1.4 0.6	0.7 0.9 1.3 0.6	%
Equivalent input noise, w/o Noise reduction	HFA	22	20	dB SPL
Frequency range		≤200 - ≥8000	≤200 - ≥8000	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

All specifications are subject to change without notice.

Maximum Output (OSPL 90)

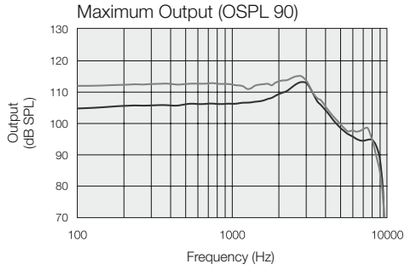


Full-On and Reference Test Gain

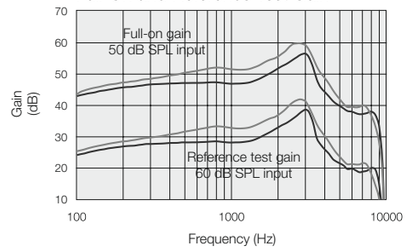

LP
MP

Fitting range



Technical Specifications


		HP ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	41	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	dB
Maximum output (90 dB SPL input)	Max. HFA	120 118	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.5 0.8 0.8 0.4	%
Equivalent input noise, w/o Noise reduction	HFA	21	dB SPL
Frequency range		≤200 - 6590	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	Hours

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

All specifications are subject to change without notice.

Maximum Output (OSPL 90)

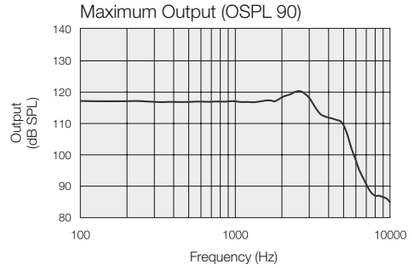

Full-On and Reference Test Gain

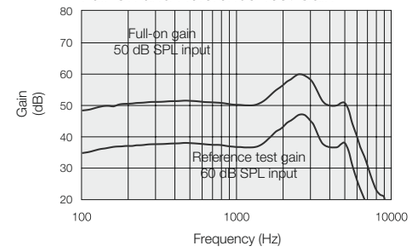

HP

Fitting range

