ReSound Nexia™



ITE

Model	NX9ITE-DWC	NX7ITE-DWC	NX5ITE-DWC	NX4ITE-DWC*
Device Configurations				
Battery	Rechargeable Lithium-Ion			
Control Options	Push button			
Receiver Options	MP, HP, UP			
IP Classification	IP68			
Audiological Features				
Number of Channels	17	14	12	12
360 All-Around	●	–	–	–
All Access Directionality	–	●	–	–
Binaural Directionality III	–	–	●	–
Binaural Directionality	–	–	–	●
Spatial Sense	●	●	●	–
Front Focus	●	–	–	–
Ultra Focus	–	●	–	–
Synchronised Soft Switching	●	●	●	●
Environmental Optimiser II	●	–	–	–
Environmental Optimiser I	–	●	●	–
Noise Tracker II	5 settings	3 settings	2 settings	On/Off
Expansion	3 settings	2 settings	On/Off	On/Off
Impulse Noise Reduction	3 settings	3 settings	On/Off	On/Off
Wind Guard	3 settings	2 settings	On/Off	On/Off
Sound Shaper	●	●	●	●
DFS Ultra III (w/ Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
Functional Features				
Ear to Ear Communication	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS** and Android™ devices)	●	●	●	●
TV-Streamer+	●	●	●	●
TV Streamer 2, Remote Control, Remote Control 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●	●
ReSound Smart 3D™ app	●	●	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	–	–	–
Remote Fine Tuning and Updates				
ReSound Assist	●	●	●	●
ReSound Assist Live	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Fitting Software ReSound Smart Fit™ 1.18 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Auto DFS	●	●	●	●
Datalogging	●	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●	●

* Availability of models may vary by country.
** MFi supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation), iPad (10th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later.

Made for iPhone | iPad | iPod
Works with Android

© 2023 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.
Android is a trademark of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.
The Auracast word mark and logos are trademarks owned by Bluetooth SIG, Inc.



Custom charger



Charging cable



AC/DC Adaptor
(EU example)

Technical data	Custom charger
Dimensions	82,0 mm x 48,0 mm x 58,0 mm / 3.2” x 1.9” x 2.3”
Weight	108 g, tolerance is ±10 g.
Power Supply	USB power supply, 5 V
Power Connector	USB-C
Charging form factor (CFF)	Custom
Charging time for Hearing Instrument	< 30 °C (86F): 5 hours, dependent on the initial state of charge of the battery
Wireless frequency between Hearing Instrument and Charger	2.4 GHz and 135.6 kHz
ESD tolerance	According to IEC 61000-4-2 Electrostatic discharge immunity test standard
Operating & Charging temperature	+ 5 °C (41F) to + 30 °C (86F) at a relative humidity range of 15% to 90%, non-condensing
Storage temperature for charger and Hearing Instrument	– 25 °C (-13F) to + 5 °C (41F), + 5 °C (41F) to + 35 °C (95F) at a relative humidity up to 90%, non-condensing, > 35 °C (95F) to 60 °C (140F) at a water vapour pressure up to 50 hPa

40260900GB-25.03-Rev.C

Worldwide Headquarters
GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel: +45 4575 1111
resound.com

CVR no. 55082715

United Kingdom
GN Hearing UK Ltd.
Unit 13
Talisman Business Centre
Bicester
Oxon OX26 6HR
Tel: +44 1869 352800
resound.com

Australia
GN Hearing Australia Pty Ltd
Suite 1001, Level 1
1 Julius Avenue
North Ryde, NSW 2113
Australia
Tel: (free) 1800 658 955
resound.com


New Zealand
GN Hearing New Zealand Limited
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel: (free) 0800 900 126
resound.com

Technical Specifications


		MP		
		IEC 60118-0: 1983_AMD1:1994 IEC60118-0:2015 IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	43	38	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	60 52	50 45	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	128 122	118 114	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.6 0.8 0.9	0.6 0.6 0.7 0.3	%
Equivalent input noise, w/o Noise reduction		24	22	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	8	8	dB SPL
Frequency range		<200 - >8000	<200 - >8000	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours


* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

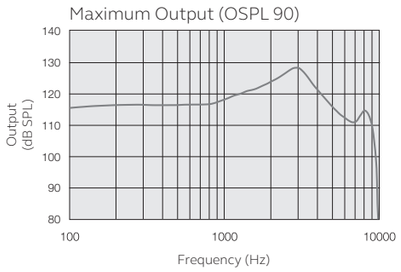


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

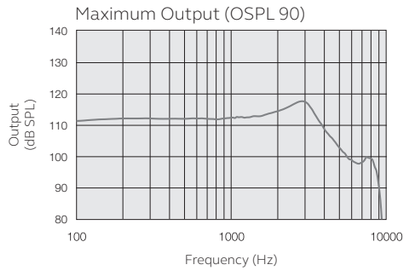

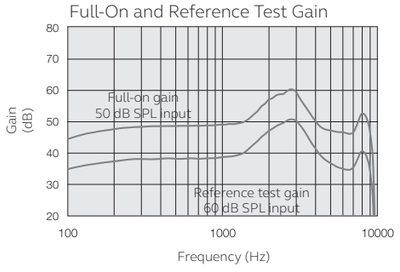

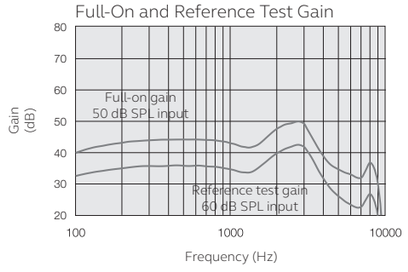

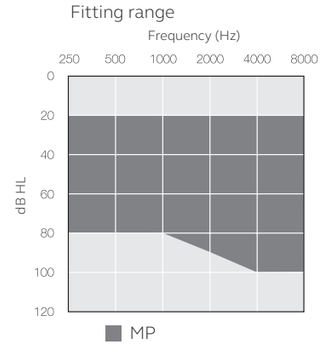


Patents pending.
All specifications are subject to change without notice.

Technical Specifications


		HP		UP		
		IEC 60118-0: 1983_AMD1:1994 IEC60118-0:2015 IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	IEC 60118-0: 1983_AMD1:1994 IEC60118-0:2015 IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	50	41	61	48	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	70 63	60 54	78 75	70 63	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	131 127	121 119	138 138	130 125	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.5 0.9 1.2	0.5 0.6 0.8 0.2	0.9 0.8 0.2	0.6 0.6 0.2 0.1	%
Equivalent input noise, w/o Noise reduction		24	23	19	21	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	10	10	10	8	dB SPL
Frequency range		<200 - >8000	<200 - 7740	<200 - 7880	<200 - 5770	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	30 (max) 24 (typ)	30 (max) 24 (typ)	Hours

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

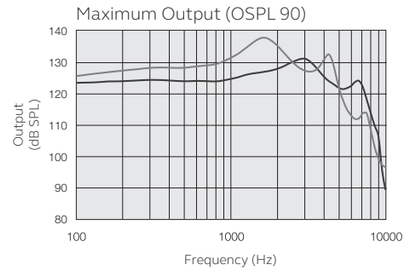



ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

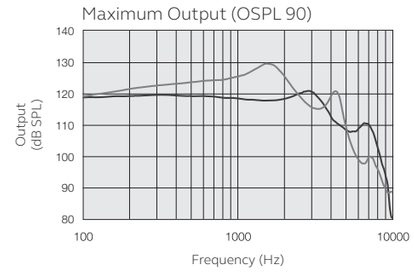



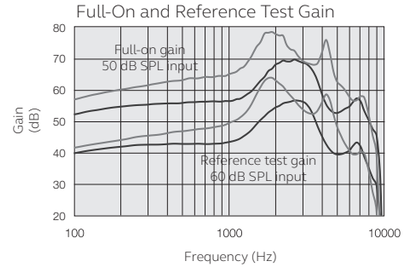

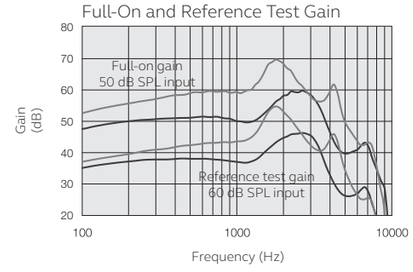

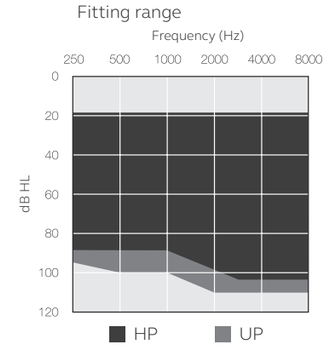

Patents pending.
All specifications are subject to change without notice.