ReSound OMNIA™



RU61-DRW RU61-DRWC RU62-DRW

Model (MM Receiver)	RU961-DRW RU961-DRWC RU962-DRW	RU761-DRW RU761-DRWC RU762-DRW	RU561-DRW RU561-DRWC RU562-DRW
Device Configurations			
Battery size 61-DRW	312 Zinc-Air		
Battery size 61-DRWC	Rechargeable Lithium-Ion		
Battery size 62-DRW	13 Zinc-Air		
Receiver Options	MM		
Control Options	PB (61-DRW and 61-DRWC), Multi-Function button (62), Telecoil (62)		
IP Classification	IP68		
Audiological Features			
Number of Channels	17	14	12
360 All-Around	●	–	–
All Access Directionality	–	●	–
Binaural Directionality III	–	–	●
M&RIE	●	●	●
Front Focus	●	–	–
Ultra Focus	–	●	–
Synchronized Soft Switching	●	●	●
Environmental Optimizer II	●	–	–
Environmental Optimizer I	–	●	●
Noise Tracker II	5 settings	3 settings	2 settings
Expansion	3 settings	2 settings	On/Off
Impulse Noise Reduction	3 settings	3 settings	On/Off
Wind Guard	3 settings	2 settings	On/Off
DFS Ultra III (w/ Music Mode)	●	●	●
Synchronized Acceptance Manager	●	●	●
Tinnitus Sound Generator	●	●	●
Functional Features			
Ear to Ear Communication	●	●	●
Direct audio streaming	●	●	●
ReSound TV Streamer 2, Remote Control, Remote Control 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●
ReSound Smart 3D™ app	●	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	–	–
ReSound Assist			
Remote Fine Tuning	●	●	●
Remote Firmware Updates	●	●	●
ReSound Assist Live	●	●	●
Fitting Features			
Fitting Software Smart Fit™ 1.15 or higher	●	●	●
Fully Flexible Programs	4	4	4
Datalogging	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●
Automatic Receiver Detection	●	●	●



Desktop Charger
(N/A in Canada for ReSound Omnia)



Premium Charger



Standard Charger

Technical data	Premium Charger	Standard Charger	Desktop Charger*
Dimensions	99.4 x 35 x 67.5 mm / 3.9 x 1.4 x 2.7”	100.2 x 42 x 54.8 mm / 3.9 x 1.7 x 2.2"	82 x 36 x 46 mm / 3.2 x 1.4 x 1.8”
Weight	145 grams / 5.1 oz	95 grams / 3.3 oz	82 grams / 2.9 oz
Power Supply	USB power supply, 5 V	USB power supply, 5 V	USB power supply, 5 V
Internal Power Source	Rechargeable Lithium Ion battery, 3.6 V, 2600 mAh	N/A	N/A
Charging time for internal lithium ion battery in the charger	Max 3.5 hours, depending on initial state of the battery	N/A	N/A
Battery life (fully charged, not connected to grid power)	Min. three full charges of two hearing instruments, Without hearing instruments: 12 months	N/A	N/A
Charging time for the hearing instrument	< 40 °C (104F): 3 hours, depending on initial state of the battery	< 40 °C (104F): 3 hours, depending on initial state of the battery	< 40 °C (104F): 3 hours, depending on initial state of the battery
Wireless frequency between the hearing instrument and charger	2.4 GHz and 333 kHz	2.4 GHz and 333 kHz	2.4 GHz and 333 kHz
ESD tolerance	According to IEC 61000-4-2 Electrostatic discharge immunity test standard	According to IEC 61000-4-2 Electrostatic discharge immunity test standard	According to IEC 61000-4-2 Electrostatic discharge immunity test standard
Operating & Charging temperature	+ 5 °C (41F) to + 40 °C (104F) at a relative humidity range of 15% to 90%, non-condensing	+ 5 °C (41F) to + 40 °C (104F) at a relative humidity range of 15% to 90%, non-condensing	+ 5 °C (41F) to + 40 °C (104F) at a relative humidity range of 15% to 90%, non-condensing
Storage temperature for charger and hearing instrument	– 25 °C (-13F) to + 5 °C (41F), + 5 °C (41F) to + 35 °C (95F) at a relative humidity up to 90%, non-condensing, > 35 °C (95F) to 70 °C (158F) at a water vapor pressure up to 50 hPa	– 25 °C (-13F) to + 5 °C (41F), + 5 °C (41F) to + 35 °C (95F) at a relative humidity up to 90%, non-condensing, > 35 °C (95F) to 70 °C (158F) at a water vapor pressure up to 50 hPa	– 25 °C (-13F) to + 5 °C (41F), + 5 °C (41F) to + 35 °C (95F) at a relative humidity up to 90%, non-condensing, > 35 °C (95F) to 70 °C (158F) at a water vapor pressure up to 50 hPa

*N/A in Canada for ReSound Omnia

Made for iPhone | iPad | iPod

Works with android

© 2022 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the US and other countries. Android is a trademark of Google LLC.

GN Making Life Sound Better

401877011US CA VA-22.08-Rev.C

Manufacturer according to FDA:

Hearing aids
GN ReSound North America
8001 E Bloomington Freeway
Bloomington, MN 55420
USA
1-888-735-4327
resound.com

ReSound Government Services
8001 E Bloomington Freeway
Bloomington, MN 55420
USA
1-800-392-9932
resound.com/veterans

Manufacturer according to Health Canada:

Hearing aids
ReSound Canada
2 East Beaver Creek Road, Building 3
Richmond Hill, ON L4B 2N3
Canada
1-888-737-6863
resound.com

Manufacturer according to Health Canada:

Hearing aid charger
GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark


Technical specifications

		MM		
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015 IEC 711 Ear Simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	41	33	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	63 53	53 47	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	124 117	115 110	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.3 1.4 0.8	0.1 0.9 0.4	%
Telecoil sensitivity (1 mA/m input)*	Max.	92	82	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	103	93	dB SPL
Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	82	75	
Equivalent input noise, w/o noise reduction		22	20	dB SPL
1/3 Octave Equivalent input noise, w/o noise reduction	1600 Hz	7	7	dB SPL
Frequency range IEC60118-0:2015**		100-9550	100-9100	Hz
Battery Lifetime (Battery type Rechargeable)***		30	30	Hours
Current Drain (Quiescent / Operating) (Model 61-DRW, 62-DRW)		0.82 / 0.85	0.82 / 1.04	mA

* Telecoil is only for the RUx62-DRW models.
** Measured according to IEC 60118-0:2015, with 711 Ear Simulator coupler.
*** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

Maximum Output (OSPL 90)

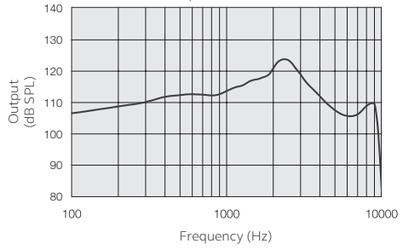


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler


Maximum Output (OSPL 90)

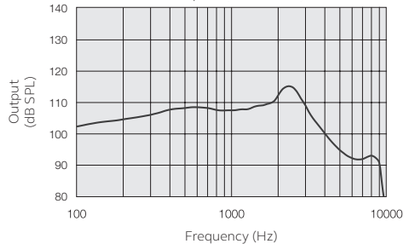


Full-On and Reference Test Gain

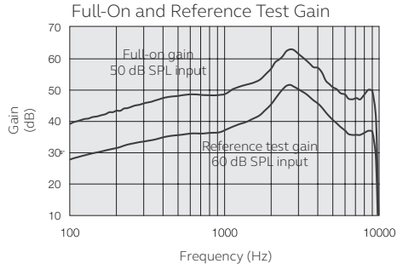


Full-On and Reference Test Gain

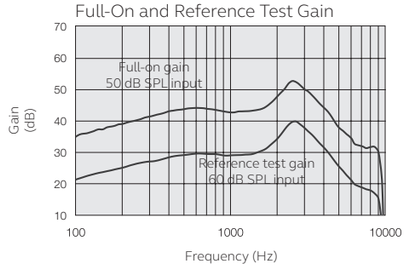

Fitting Range



Full-On Telecoil Response
Input level 10 mA/m

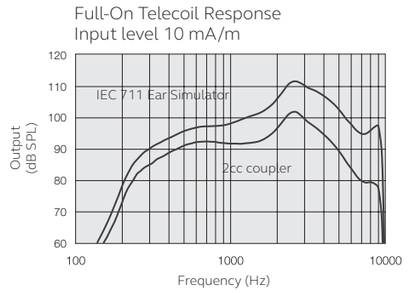

Patents pending.

All specifications are subject to change without notice.