
ReSound ONE™




ITE

Model	RT9ITE-DWC	RT7ITE-DWC	RT5ITE-DWC
Device Configurations			
Battery	Rechargeable Lithium-Ion		
Control Options	Push Button		
Receiver Options	MP, HP, UP		
IP Classification	IP68		
Audiological Features			
Number of Channels	17	14	12
All Access Directionality	●	–	–
Spatial Sense	●	●	–
Ultra Focus	●	–	–
Binaural Directionality III	–	●	–
Binaural Directionality	–	–	●
Synchronised Soft Switching	●	●	●
Environmental Optimizer II	●	–	–
Environmental Optimizer I	–	●	●
Noise Tracker II	5 settings	3 settings	2 settings
Expansion	3 settings	2 settings	On/Off
Impulse Noise Reduction	3 settings	3 settings	On/Off
Wind Guard	3 settings	2 settings	On/Off
Sound Shaper	●	●	●
Adjustable Directional Mix	●	–	–
AutoScope Adaptive Directionality	●	–	–
MultiScope Adaptive Directionality	–	●	–
Adaptive Directionality	●	●	●
Fixed Directionality	●	●	●
Synchronised Acceptance Manager	●	●	●
DFS Ultra III (w/ Music Mode)	●	●	●
Tinnitus Sound Generator	●	●	●
Functional Features			
Ear to Ear Communication	●	●	●
Direct audio streaming	●	●	●
ReSound TV Streamer 2, Remote Control, Remote Control 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●
ReSound Smart 3D™ app	●	●	●
Sound Enhancer (ReSound Smart 3D™ app)	●	–	–
ReSound Assist			
Remote Fine Tuning	●	●	●
Remote Firmware Updates	●	●	●
ReSound Assist Live	●	●	●
Fitting Features			
Fitting Software Smart Fit™ 1.14 or higher	●	●	●
Fully Flexible Programs	4	4	4
Low Frequency Boost (UP receiver only)	3 settings	2 settings	On/Off
Auto DFS	●	●	●
Datalogging	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●

Fitting range







Custom charger



Charging cable



AC/DC Adaptor (EU example)

Technical data	Custom charger
Dimensions	82.0mm(L) x 48.0mm(W) x 58mm(H), tolerance is ±1.0mm
Weight	108g, tolerance is ±10g.
Power Supply	USB power supply, 5 V
Power Connector	USB-C
Charging time for Hearing Instrument	< 30 °C (86F): 5 hours, dependent on the initial state of charge of the battery
Wireless frequency between Hearing Instrument and Charger	2.4 GHz and 135.6 kHz
ESD tolerance	According to IEC 61000-4-2 Electrostatic discharge immunity test standard
Operating & Charging temperature	+ 5 °C (41F) to + 30 °C (86F) at a relative humidity range of 15% to 90%, non-condensing
Storage temperature for charger and Hearing Instrument	– 25 °C (-13F) to + 5 °C (41F), + 5 °C (41F) to + 35 °C (95F) at a relative humidity up to 90%, non-condensing, > 35 °C (95F) to 60 °C (140F) at a water vapour pressure up to 50 hPa

Made for iPhone | iPad | iPod

Works with android

© 2022 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC.

GN Making Life Sound Better

4018940000GB-22.04-Rev.A

Worldwide Headquarters
GN ReSound A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com

CVR no. 55082715

United Kingdom
GN Hearing UK Ltd.
Unit 13
Talisman Business Centre
Bicester
Oxon OX26 6HR
Tel: +44 1869 352800
resound.com

Australia
GN Hearing Australia Pty Ltd
Gate C, 19-25 Khartoum Road
Macquarie Technology Park
Macquarie Park NSW 2113
Tel.: (free) 1800 658 955
resound.com

New Zealand
GN Hearing New Zealand Limited
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel.: (free) 0800 900 126
resound.com


Singapore
GN Hearing Pte. Ltd.
456 Alexandra Road
#22-01
Singapore 119962
Tel: +65 6320 9388
resound.com

Technical Specifications


		MP		
		IEC 60118-0: 1983_AMD1:1994 IEC60118-0:2015* IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	43	38	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	60 52	50 45	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	128 122	118 114	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.6 0.8 0.9	0.6 0.6 0.7 0.3	%
Equivalent input noise, w/o Noise reduction		24	22	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	8	8	dB SPL
Frequency range IEC 60118-0: 2015*		100-9510	100-9100	Hz
Battery Lifetime (Battery type Rechargeable)**		Up to 24	Up to 24	Hours

* Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

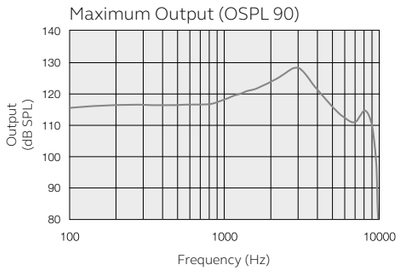


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

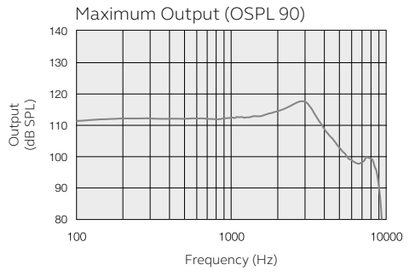

MP

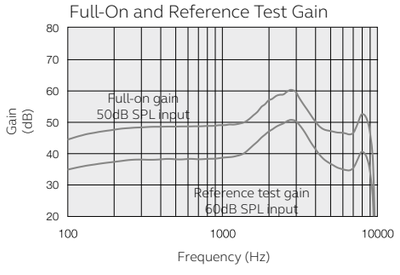

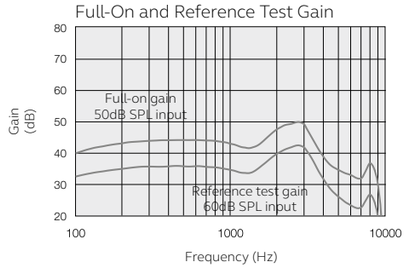


Patents pending
All specifications are subject to change without notice

Technical Specifications


		HP		UP		
		IEC 60118-0: 1983_AMD1:1994 IEC60118-0:2015* IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	IEC 60118-0: 1983_AMD1:1994 IEC60118-0:2015* IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	50	41	61	48	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	70 63	60 54	78 75	70 63	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	131 127	121 119	138 138	130 125	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.5 0.9 1.2	0.5 0.6 0.8 0.2	0.9 0.8 0.2	0.6 0.6 0.2 0.1	%
Equivalent input noise, w/o Noise reduction		24	23	19	21	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	10	10	10	8	dB SPL
Frequency range IEC 60118-0: 2015*		100-8850	100-7740	100-7880	100-5770	Hz
Battery Lifetime (Battery type Rechargeable)**		Up to 24	Up to 24	Up to 24	Up to 24	Hours

* Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

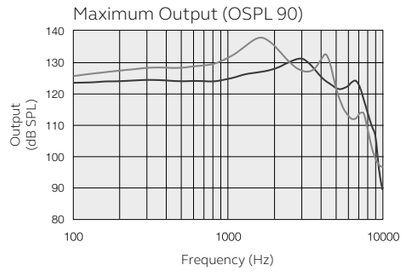


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

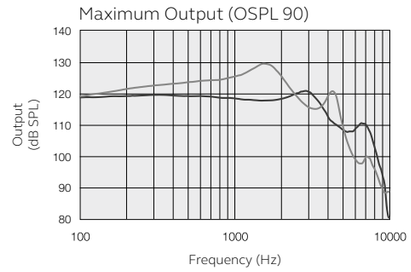

HP
UP

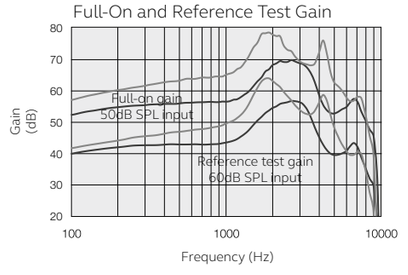

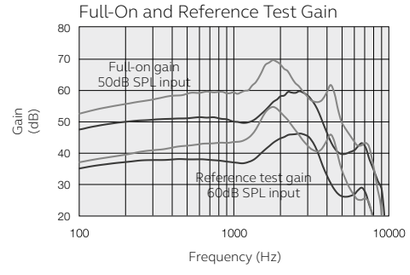

Patents pending
All specifications are subject to change without notice