
ReSound ONE



CIC

Model	RT9-CIC	RT7-CIC	RT5-CIC
Device Configurations			
Battery size	10A		
Power levels	LP, MP & HP		
Colors available	6		
Audiological Features			
Number of channels	17	14	12
Environmental Optimizer II	●	–	–
Environmental Optimizer	–	●	●
Noise Tracker II	5 settings	3 settings	2 settings
Expansion	3 settings	2 settings	On/Off
Impulse Noise Reduction	3 settings	3 settings	On/Off
Extended Bandwidth	●	●	●
Sound Shaper	●	●	●
DFS Ultra III (w/ Music Mode)	●	●	●
Acceptance Manager	●	●	●
Tinnitus Sound Generator	●	●	●
Functional Features			
Smart Start	●	●	●
Fitting Features			
Fitting Software ReSound Smart Fit™ 1.15 or higher	●	●	●
Fully Flexible Programs	4	4	4
Auto DFS	●	●	●
Onboard Analyzer II	●	●	●

Fitting range

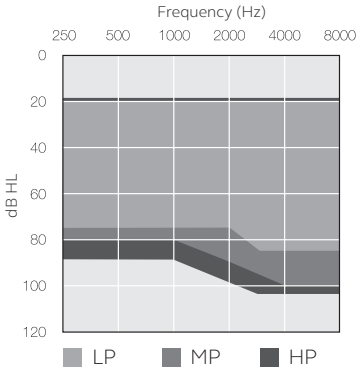

GN Making Life Sound Better


© 2022 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S.

Technical Specifications

		LP	MP	HP	
		ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	31	37	41	dB
Full-on gain (50 dB SPL input)	Max. HFA	40 37	50 45	60 52	dB
Maximum output (90 dB SPL input)	Max. HFA	114 108	116 114	121 118	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.8 1.0 0.8 0.2	0.6 0.5 0.4 0.3	0.5 0.7 0.2 0.2	%
Equivalent input noise, w/o Noise reduction		23	23	22	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	10	11	10	dB SPL
Frequency range IEC 60118-0: 2015		100-8810	100-8180	100-7210	Hz
Current Drain (Quiescent / Operating) (Battery type 10)		0.53 / 0.73	0.52 / 0.87	0.54 / 0.75	mA


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

Maximum Output (OSPL 90)

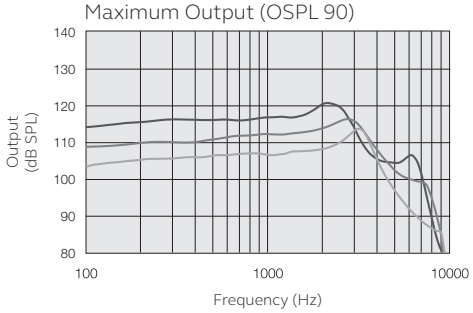

LP MP HP

Full-On and Reference Test Gain

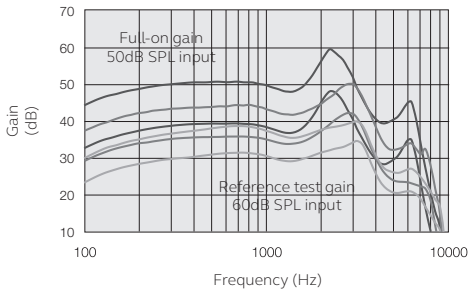

Patents pending

All specifications are subject to change without notice

4019380000GB-22.06-Rev.B

Worldwide Headquarters
GN ReSound A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com

CVR no. 55082715

United Kingdom
GN Hearing UK Ltd.
Unit 13
Talisman Business Centre
Bicester
Oxon OX26 6HR
Tel: +44 1869 352800
resound.com

Australia
GN Hearing Australia Pty Ltd
Gate C, 19-25 Khartoum Road
Macquarie Technology Park
Macquarie Park NSW 2113
Tel.: (free) 1800 658 955
resound.com

New Zealand
GN Hearing New Zealand Limited
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel.: (free) 0800 900 126
resound.com

Singapore
GN Hearing Pte. Ltd.
456 Alexandra Road
#22-01
Singapore 119962
Tel: +65 6320 9388
resound.com