# ReSound Savi™



ITC

| Model | SA4ITC-DW | SA3ITC-DW | SA2ITC-DW* |
|---|---|---|---|
| **Device Configurations** | | | |
| Battery | 312 | | |
| Control Options | Push button and Volume Control | | |
| Receiver Options | LP, MP, HP, UP | | |
| IP Classification | IP68 | | |
| **Audiological Features** | | | |
| Number of Channels | 12 | 12 | 10 |
| Adaptive directionality | ● | ● | ● |
| Soft Switching | ● | ● | ● |
| Fixed Directionality | ● | ● | ● |
| Streaming Bass Boost | 2 settings | 1 setting | 1 setting |
| Environmental Optimiser I | ● | – | – |
| Noise Tracker II | 2 settings | 1 setting | 1 setting |
| Expansion | 2 settings | 1 setting | 1 setting |
| Impulse Noise Reduction | 2 settings | 1 setting | – |
| Wind Guard | 2 settings | 1 setting | 1 setting |
| Sound Shaper | ● | ● | ● |
| DFS Ultra III | ● | ● | ● |
| Music Mode | ● | – | – |
| Synchronised Acceptance Manager | ● | ● | ● |
| Low frequency Boost** | ● | ● | ● |
| Amplification Strategy (WDRC/Semi-Linear/Linear)** | ● | ● | ● |
| Tinnitus Sound Generator | ● | ● | ● |
| **Functional Features** | | | |
| Ear to Ear Communication (Controls only) | ● | ● | ● |
| Bluetooth® Auracast™ | ● | ● | ● |
| Direct audio streaming (compatible iOS and Android™ devices) | ● | ● | ● |
| TV-Streamer+, Multi-Mic+ and Remote Control | ● | ● | ● |
| ReSound Smart 3D™ app | ● | ● | ● |
| **Remote Fine Tuning and Updates** | | | |
| ReSound Assist | ● | ● | ● |
| ReSound Assist Live | ● | ● | ● |
| Remote Firmware Updates | ● | ● | ● |
| **Fitting Features** | | | |
| Fitting Software ReSound Smart Fit™ 2.3 or higher | ● | ● | ● |
| Fully Flexible Programs | 4 | 4 | 4 |
| Auto DFS | ● | ● | ● |
| Datalogging | ● | ● | ● |
| Wireless Fitting with Noahlink Wireless | ● | ● | ● |

* Availability of models may vary by country.
** Only available for UP receiver.

© 2025 GN Hearing A/S. All rights reserved. ReSound is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
Android is a trademark of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.
The Auracast word mark is a trademark owned by Bluetooth SIG, Inc.

4032140000GB-26.02-Rev.B

**Worldwide Headquarters**
GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com

CVR no. 55082715

**United Kingdom**
GN Hearing UK Ltd.
Unit 13
Talisman Business Centre
Bicester
Oxon OX26 6HR
Tel: +44 1869 352800
resound.com

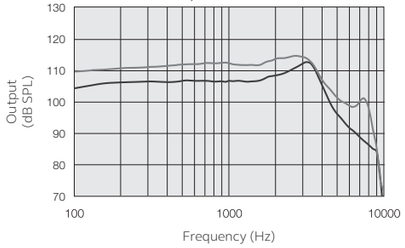
**Australia**
GN Hearing Australia Pty Ltd
Suite 1001, Level 1
1 Julius Avenue
North Ryde, NSW 2113
Australia
Tel: (free) 1800 658 955
www.gnhearing.com/en-au/

**New Zealand**
GN Hearing New Zealand Limited
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel.: (free) 0800 900 126
www.gnhearing.com/en-nz/

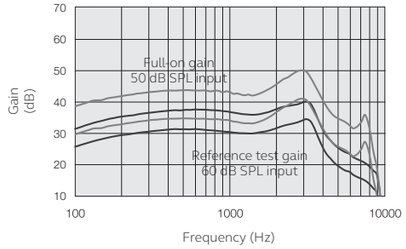
# Technical Specifications

| | | LP | MP | |
|---|---|---|---|---|
| | | ANSI S3.22-2014<br>IEC 60118-0:2022<br>2cc coupler | ANSI S3.22-2014<br>IEC 60118-0:2022<br>2cc coupler | |
| Reference test gain (60 dB SPL input) | HFA | 31 | 36 | dB |
| Full-on gain (50 dB SPL input) | Max.<br>HFA | 40<br>37 | 50<br>45 | dB |
| Maximum output (90 dB SPL input) | Max.<br>HFA | 113<br>108 | 115<br>113 | dB SPL |
| Total harmonic distortion | 500 Hz<br>800 Hz<br>1600 Hz<br>3200 Hz | 1.3<br>1.3<br>1.0<br>0.2 | 0.6<br>0.8<br>0.5<br>0.2 | % |
| Equivalent input noise | | 23 | 23 | dB SPL |
| Frequency range | | ≤200 - ≥8000 | ≤200 - ≥8000 | Hz |
| Current Drain (Quiescent / Operating)<br>(Battery type 312) | | 0.75 / 0.95 | 0.78 / 1.05 | mA |

Maximum Output (OSPL 90)





Full-On and Reference Test Gain







Fitting range



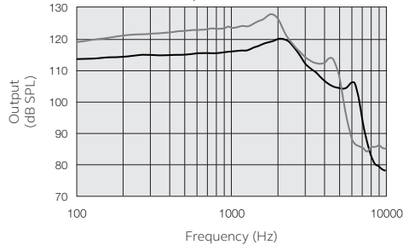

Patents pending.

All specifications are subject to change without notice.

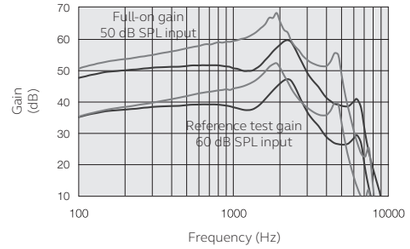
# Technical Specifications

| | | HP | UP | |
|---|---|---|---|---|
| | | ANSI S3.22-2014<br>IEC 60118-0:2022<br>2cc coupler | ANSI S3.22-2014<br>IEC 60118-0:2022<br>2cc coupler | |
| Reference test gain (60 dB SPL input) | HFA | 41 | 46 | dB |
| Full-on gain (50 dB SPL input) | Max.<br>HFA | 60<br>54 | 68<br>61 | dB |
| Maximum output (90 dB SPL input) | Max.<br>HFA | 120<br>118 | 128<br>123 | dB SPL |
| Total harmonic distortion | 500 Hz<br>800 Hz<br>1600 Hz<br>3200 Hz | 0.6<br>1.1<br>0.2<br>0.1 | 0.3<br>0.6<br>0.2<br>0.0 | % |
| Equivalent input noise | | 23 | 23 | dB SPL |
| Frequency range | | ≤200 - 6980 | ≤200 - 5350 | Hz |
| Current Drain (Quiescent / Operating)<br>(Battery type 312) | | 0.75 / 1.01 | 0.78 / 0.91 | mA |

Maximum Output (OSPL 90)





Full-On and Reference Test Gain







Fitting range




Patents pending.

All specifications are subject to change without notice.