
Danavox Klar

XC 67 Mini BTE



Thin tube Closed

Fitting range



Model	XC467-DW	XC367-DW	XC267-DW
Device Configurations			
Battery size	312 Zinc-Air		
IP Classification	IP 68		
Control Option	Telecoil		
Audiological Features			
WARP compression (WDRC) - number of channels	12	8	6
Natural Directionality II	●		
Synchronised Soft Switching	●		
Soft Switching	●	●	●
Multiscope Adaptive Directionality	●	●	
Adaptive Directionality			●
Environmental Classifier	●	●	●
DFS Ultra II	●	●	●
Music Mode	●		
Noise Tracker II	●	●	●
Wind Guard	●	●	●
Impulse Noise Reduction	●		
Expansion	●	●	●
Synchronised Acceptance Manager	●	●	
Tinnitus Sound Generator	●	●	●
Functional Features			
Synchronised Push Button *	●	●	
Smart Start	●	●	●
Phone Now	●	●	●
Comfort Phone	●	●	
Direct audio streaming (MFi, Android™ **)	●	●	
TV Streamer 2, Remote Control, Remote 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●
BeMore app	●	●	●
Online Services			
Remote Fine Tuning	●	●	●
Live Assist	●	●	●
Remote Firmware Updates	●	●	●
Fitting Features			
Fitting Software XE BeMore 1.10 or higher	●	●	●
Fully Flexible Programs	4	4	4
Auto DFS	●	●	●
Onboard Analyser II	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●

* Also including functionality for sychronized Push Button Volume Control
** Compatible with Android smartphones that support direct Android streaming to hearing aids

DANAVOX GN

Made for iPhone | iPad | iPod

Works with android

© 2021 GN Hearing A/S. All rights reserved. DANAVOX is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC.

4016690OGB-2111-Rev.B

GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
danavox.es

CVR no. 55082715

GN Hearing India Private Limited,
NMS TITANIUM
4th Floor, Office No 401-408,
Plot No. 74, Sector No.15,
CBD Belapur,
Navi Mumbai - 400614


DANAVOX GN

Technical Specifications


		XC67-DW (Thin tube)		
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015 (*) IEC 711 Ear Simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	41	36	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	60 52	52 47	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	127 117	123 113	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200Hz	0.5 0.2 0.6 -	0.4 0.1 0.4 0.2	%
Telecoil sensitivity (1 mA/m input) HFA - SPLIV @ 31.6 mA/m (ANSI) Full-on telecoil sensitivity @ 1mA/m	Max. HFA 1600 Hz/HFA	91 104 82	81 96 77	dB SPL
Equivalent input noise, w/o Noise reduction		26	22	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	10	10	dB SPL
Frequency range IEC 60118-0: 2015		100-8200*	100-7680	Hz
Current Drain (Quiescent / Operating)		1.17/1.24	1.17/1.22	mA
Weight of hering aid (without hook, tube and dome/ear mould)		2.07 / 0.07		gram/oz


* Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

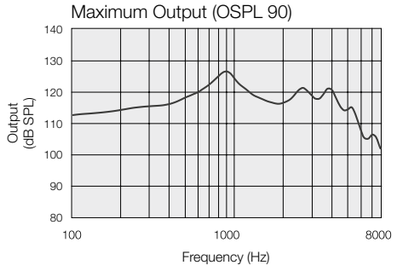


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

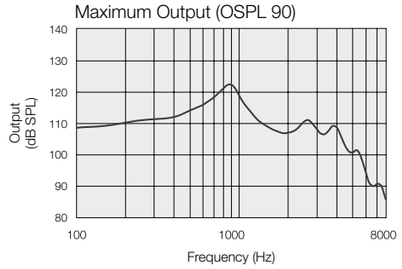

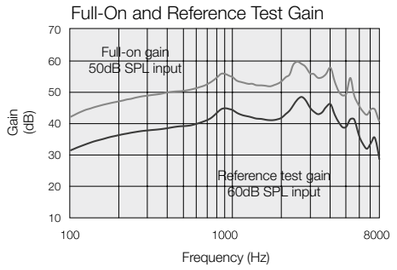

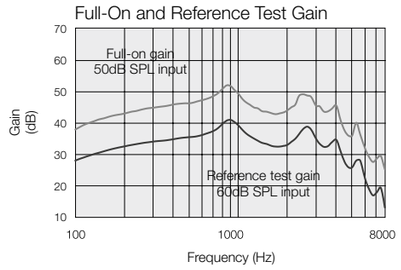

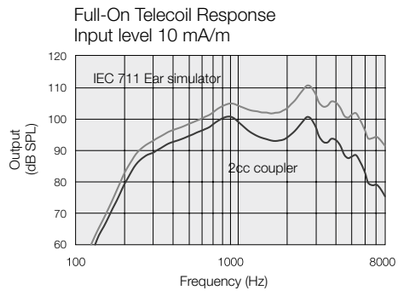

Patents pending


All specifications are subject to change without notice

Technical Specifications


		XC67-DW (Closed)		
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015 (*) IEC 711 Ear Simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	44	39	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	65 55	56 49	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	130 123	121 116	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.8 0.9 0.6 -	0.7 0.6 0.6 0.1	%
Telecoil sensitivity (1 mA/m input) HFA - SPLIV @ 31.6 mA/m (ANSI) Full-on telecoil sensitivity @ 1mA/m	Max. HFA 1600 Hz/HFA	95 105 85	85 99 79	dB SPL
Equivalent input noise, w/o Noise reduction		26	23	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	10	10	dB SPL
Frequency range IEC 60118-0: 2015		100-8060*	100-6800	Hz
Current Drain (Quiescent / Operating)		1.17/1.24	1.18/1.34	mA
Weight of hering aid (without hook, tube and dome/ear mould)		2.07 / 0.07		gram/oz


* Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

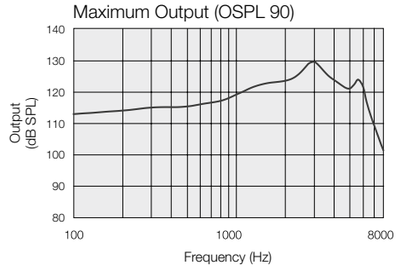


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

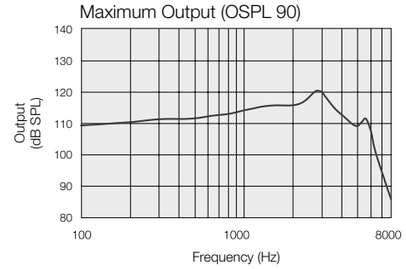

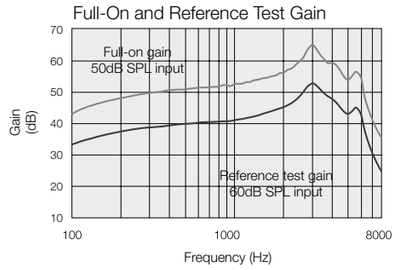

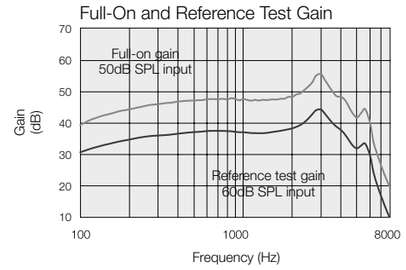

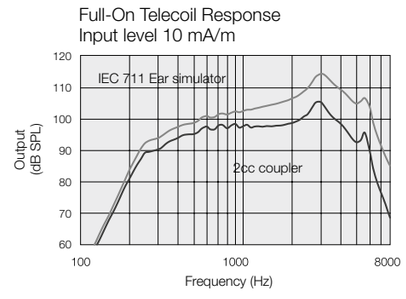

Patents pending

All specifications are subject to change without notice