
Danavox Klar

XC 88 HPBTE



High Power BTE

Fitting range

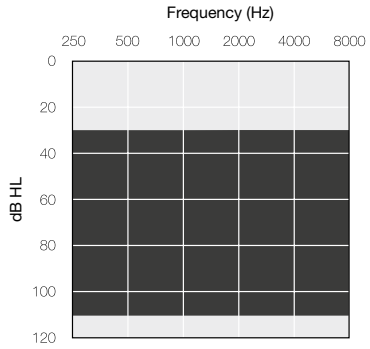

Model	XC488-DWH	XC388-DWH	XC288-DWH	XC188-DWH
Device Configurations				
Battery size	13 Zinc-Air			
IP Classification	IP 68			
Control Option	Telecoil, DAI			
Audiological Features				
WARP compression (WDRC) - number of channels	12	8	6	4
Natural Directionality II	●			
Synchronised Soft Switching	●			
Soft Switching	●	●	●	
Multiscope Adaptive Directionality	●	●		
Adaptive Directionality			●	
Omni/ Fixed Directionality				●
Environmental Classifier	●	●	●	●
DFS Ultra II	●	●	●	
Music Mode	●			
Noise Tracker II	●	●	●	●
Wind Guard	●	●	●	
Impulse Noise Reduction	●			
Expansion	●	●	●	●
Synchronised Acceptance Manager	●	●		
Tinnitus Sound Generator	●	●	●	
Functional Features				
Synchronised Push Button	●	●		
Synchronised Volume Control	●	●		
Volume Control	●	●	●	●
Phone Now	●	●	●	●
Comfort Phone	●	●		
Direct audio streaming (MFi, Android™*)	●	●		
TV Streamer 2, Remote Control, Remote 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●	RC only
BeMore app	●	●	●	●
Online Services				
Remote Fine Tuning	●	●	●	●
Live Assist	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Fitting Software XE BeMore 1.10 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	2
Auto DFS	●	●	●	●
Onboard Analyser II	●	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●	●

* Compatible with Android smartphones that support direct Android streaming to hearing aids

Made for iPhone | iPad | iPod

Works with android

DANAVOX GN

© 2021 GN Hearing A/S. All rights reserved. DANAVOX is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC.


Technical Specifications


		XC88-DWH		
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015 (*) IEC 711 Ear Simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	60	53	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	80 73	73 67	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	141 135	134 130	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	1.4 0.6 0.8 -	2.8 0.4 0.4 0.1	%
Telecoil sensitivity (1 mA/m input) HFA - SPLIV @ 31.6 mA/m (ANSI) Full-on telecoil sensitivity @ 1mA/m	Max. HFA 1600 Hz/HFA	110 123 104	103 114 98	dB SPL
Equivalent input noise, w/o Noise reduction		23	22	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	13	12	dB SPL
Frequency range IEC 60118-0: 2015		100-5270*	100-4940	Hz
Current Drain (Quiescent / Operating)		1.18/1.4	1.18/1.4	mA
Weight of hering aid (without hook, tube and dome/ear mould)		4.35 / 0.15		gram/oz


* Measured according to IEC60118-0:2015, with 711-Ear simulator coupler.


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

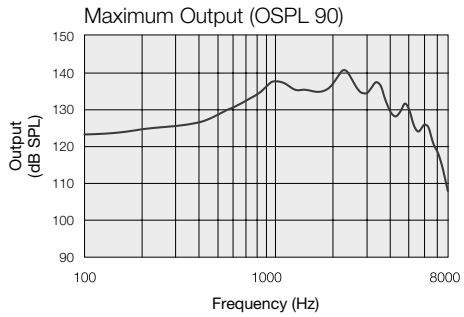

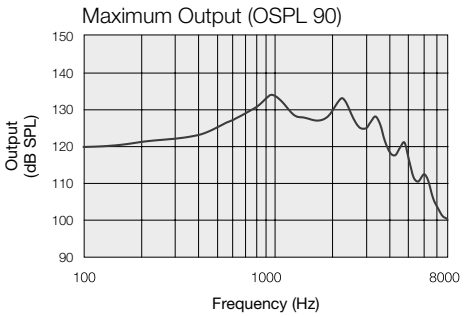

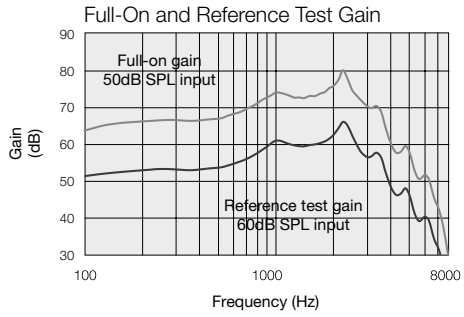

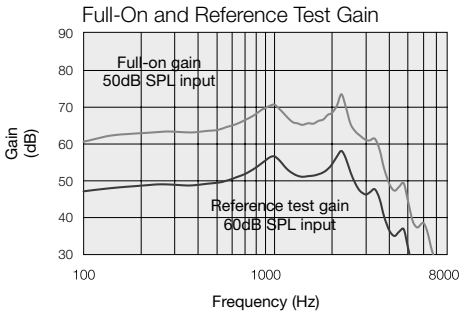

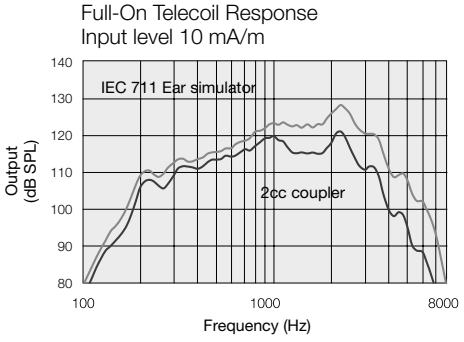

Patents pending

All specifications are subject to change without notice

401674000GB-21.11-Rev.B

GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
danavox.es

CVR no. 55082715

GN Hearing India Private Limited,
NMS TITANIUM
4th Floor, Office No 401-408,
Plot No. 74, Sector No.15,
CBD Belapur,
Navi Mumbai - 400614