
Danavox Klar


XC ITE



ITE

Fitting range





Model	XC4ITE-DW	XC3ITE-DW	XC2ITE-DW
Device Configurations			
Battery size	312/13 Zinc-Air		
Receiver power levels	MP, HP & UP		
Control Options	Push button, Volume control, Telecoil		
Audiological Features			
WARP compression (WDRC) - number of channels	12	8	6
Natural Directionality II	●		
Synchronised Soft Switching	●		
Soft Switching	●	●	●
Multiscope Adaptive Directionality	●	●	
Adaptive Directionality			●
Environmental Classifier	●	●	●
DFS Ultra II	●	●	●
Music Mode	●		
Noise Tracker II	●	●	●
Wind Guard	●	●	●
Impulse Noise Reduction	●		
Expansion	●	●	●
Synchronised Acceptance Manager	●	●	
Low Frequency Boost (Only UP)	●	●	●
Tinnitus Sound Generator	●	●	●
Functional Features			
Synchronised Push Button	●	●	
Synchronised Volume Control	●	●	
Smart Start	●	●	●
Phone Now	●	●	●
Comfort Phone	●	●	
Direct audio streaming (MFi, Android™*)	●	●	
TV Streamer 2, Remote Control, Remote 2, Phone Clip+, Micro Mic and Multi Mic	●	●	●
BeMore app	●	●	●
Online Services			
Remote Fine Tuning	●	●	●
Live Assist	●	●	●
Remote Firmware Updates	●	●	●
Fitting Features			
Fitting Software XE Bemore 1.10 or higher	●	●	●
Fully Flexible Programs	4	4	4
Auto DFS	●	●	●
Onboard Analyser II	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●

* Compatible with Android smartphones that support direct Android streaming to hearing aids.

DANAVOX GN

Made for iPhone | iPad | iPod

Works with android

© 2021 GN Hearing A/S. All rights reserved. DANAVOX is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC.

4016710000GB-21.11-Rev.B

GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
danavox.es

CVR no. 55082715

GN Hearing India Private Limited,
NMS TITANIUM
4th Floor, Office No 401-408,
Plot No. 74, Sector No.15,
CBD Belapur,
Navi Mumbai - 400614

DANAVOX GN

Technical Specifications

		MP		HP		
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015(*) IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015(*) IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	39	37	47	42	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	59 50	50 45	69 58	60 53	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	128 120	118 114	130 126	120 119	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.4 0.7 0.6	0.3 0.4 0.5 0.3	0.8 1.9 0.8	0.5 0.8 0.6 0.2	%
Telecoil sensitivity (1 mA/m input)	Max.	90	79	100	91	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	103	98	111	103	dB SPL
Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	82	76	90	84	
Equivalent input noise, w/o Noise reduction		25	23	26	24	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	10	10	11	11	dB SPL
Frequency range IEC 60118-0: 2015		100-8440*	100-8120	100-7390*	100-6710	Hz
Current Drain (Quiescent / Operating)		1.17/1.19	1.17/1.31	1.15/1.18	1.15/1.25	mA
Weight of hering aid		3.98 / 0.14		4.15 / 0.15		gram/oz

* Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.

Technical Specifications

		UP		
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015(*) IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	60	47	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	78 70	70 62	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	137 137	129 124	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.4 1.0 0.2	0.4 0.5 0.1 0.1	%
Telecoil sensitivity (1 mA/m input)	Max.	109	100	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	119	109	dB SPL
Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	103	93	
Equivalent input noise, w/o Noise reduction		20	23	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	12	13	dB SPL
Frequency range IEC 60118-0: 2015		100-5170*	100-4810	Hz
Current Drain (Quiescent / Operating)		1.17/1.24	1.17/1.21	mA
Weight of hering aid		4.53 / 0.16		gram/oz


* Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.

Patents pending

All specifications are subject to change without notice


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

Maximum Output (OSPL 90)

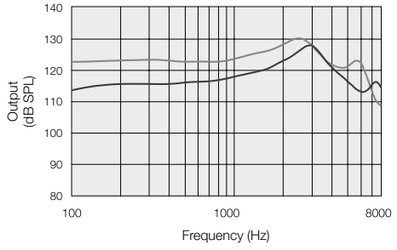


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

Maximum Output (OSPL 90)

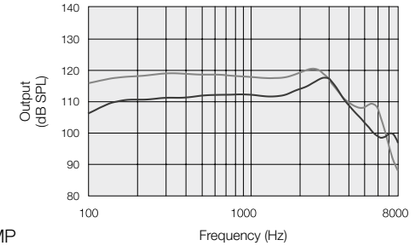


MP
HP


Full-On and Reference Test Gain

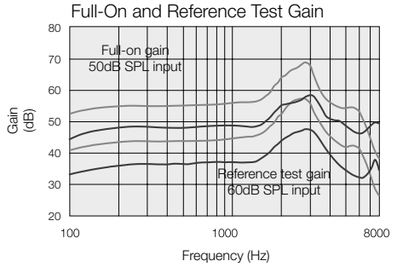

Full-On and Reference Test Gain

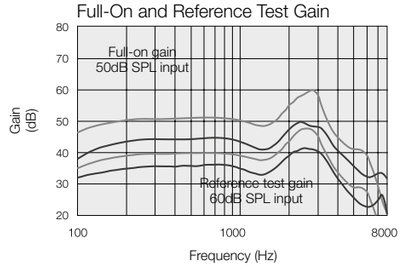

Full-On Telecoil Response
Input level 10 mA/m

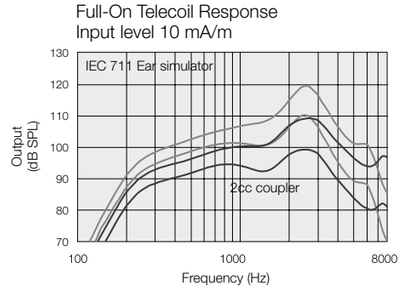


Patents pending

All specifications are subject to change without notice


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

Maximum Output (OSPL 90)

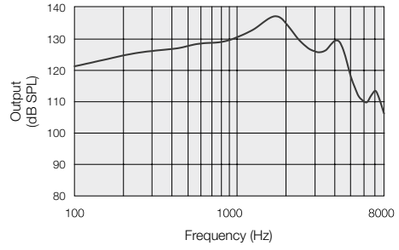


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

Maximum Output (OSPL 90)

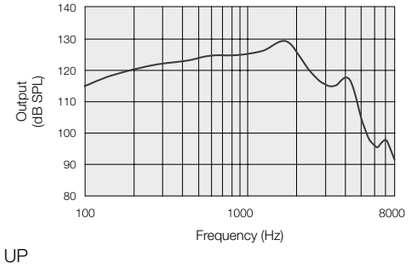


UP

Full-On and Reference Test Gain

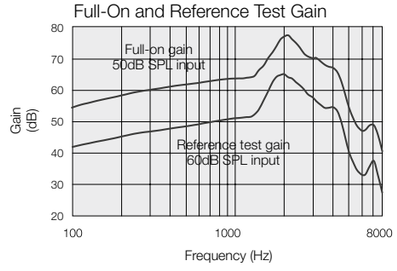

Full-On and Reference Test Gain

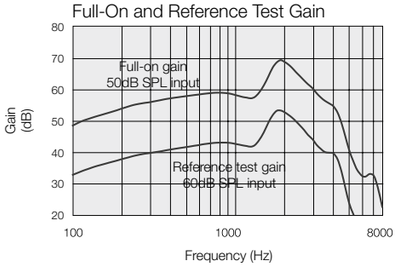

Full-On Telecoil Response
Input level 10 mA/m

