Beltone **Imagine**™



IMG63-DRW IMG63-DRWC IMG64-DRW

Model (Standard Receivers)	IMG1763-DRW IMG1763-DRWC IMG1764-DRW	IMG963-DRW IMG963-DRWC IMG964-DRW	IMG663-DRW IMG663-DRWC IMG664-DRW
Device Configurations			
Battery size 63-DRW	312 Zinc-Air		
Battery size 63-DRWC	Rechargeable Lithium-Ion		
Battery size 64-DRW	13 Zinc-Air		
Receiver Options	LP, MP, HP, UP		
Control Options	PB (63-DRW and 63-DRWC), Multi-Function button (64), Telecoil (64)		
IP Classification	IP68		
Audiological Features			
Number of Channels	17	14	12
Personal Sound ID	●	●	–
Ultra Focus	●	–	–
CrossLink Directionality 3	●	–	–
CrossLink Directionality 2	–	●	–
CrossLink Directionality	–	–	●
Synchronised Speech Spotter	●	●	●
Smart Gain Pro	●	–	–
Smart Gain	–	●	●
Sound Cleaner	5 settings	3 settings	2 settings
Silencer	3 settings	2 settings	On/Off
Impulse Noise Reduction	3 settings	3 settings	On/Off
Wind Noise Reduction	3 settings	2 settings	On/Off
Sound Shifter	●	●	●
Feedback Eraser 2	●	●	●
Synchronised Satisfy	●	●	●
Tinnitus Breaker Pro	●	●	●
Functional Features			
Ear to Ear Communication	●	●	●
Direct audio streaming	●	●	●
Beltone TV Link 2, Remote Control, Remote Control 2, Phone Link 2, MyPAL Micro and MyPAL Pro	●	●	●
Beltone HearMax™ app	●	●	●
Sound Enhancer (Beltone HearMax™ app)	●	–	–
Remote Care			
Remote Fine Tuning	●	●	●
Remote Firmware Updates	●	●	●
Beltone Remote Care Live	●	●	●
Fitting Features			
Beltone Solux Max™ 1.8 or higher	●	●	●
Max Gain Handles	17	14	12
Fully Flexible Programs	4	4	4
Safeguard Feedback Control	●	●	●
Datalogging	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●
Automatic Receiver Detection	●	●	●

Made for iPhone | iPad | iPod

Works with android

© 2021 GN Hearing Care Corporation. All rights reserved. Beltone is a trademark of GN Hearing Care Corporation.
Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.
Android is a trademark of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

Beltone

Beltone **Imagine**™

Chargers



Premium charger C-1



Standard charger C-2

Technical data	Premium Charger	Standard Charger
Dimensions	99.4 x 35 x 67.5 mm / 3.9 x 1.4 x 2.7”	100.2 mm x 42 mm x 54.8 mm / 3.9 x 1.7 x 2.2"
Weight	145 gram / 5.1 oz	95 gram / 3.3 oz
Power Supply	USB power supply, 5 V	USB power supply, 5 V
Internal Power Source	Rechargeable Lithium Ion battery, 3.6 V, 2600 mAh	N/A
Charging time for internal lithium ion battery in Charger	Max 3,5 hours, depending on initial state of the battery	N/A
Battery life (fully charged, not connected to mains power)	Min. 3 full charges of 2 hearing instruments, Without hearing instruments: 12 months	N/A
Charging time for Hearing Instrument	< 40 °C (104F): 3 hours, depending on initial state of the battery	< 40 °C (104F): 3 hours, depending on initial state of the battery
Wireless frequency between Hearing Instrument and Charger	2.4 GHz and 333 kHz	2.4 GHz and 333 kHz
ESD tolerance	According to IEC 61000-4-2 Electrostatic discharge immunity test standard	According to IEC 61000-4-2 Electrostatic discharge immunity test standard
Operating & Charging temperature	+ 5 °C to + 40 °C at a relative humidity range of 15 % to 90 %, non-condensing	+ 5 °C to + 40 °C at a relative humidity range of 15 % to 90 %, non-condensing
Storage temperature for charger and Hearing Instrument	– 25 °C to + 5 °C, + 5 °C to + 35 °C at a relative humidity up to 90 %, non-condensing, > 35 °C to 70 °C at a water vapour pressure up to 50 hPa	– 25 °C to + 5 °C, + 5 °C to + 35 °C at a relative humidity up to 90 %, non-condensing, > 35 °C to 70 °C at a water vapour pressure up to 50 hPa

401407000GB-21.08-Rev.F

Worldwide Headquarters
Beltone A/S
Lautrupbjerg 7
DK-2750 Ballerup, Denmark
Tel.: +45 45 75 11 11
beltone.com

CVR no. 55082715

Australia
GN Hearing Australia Pty Ltd
Gate C, 19-25 Khartoum Road
Macquarie Technology Park
Macquarie Park NSW 2113
Tel.: (free) 1800 658 955
beltone.com/en-au

New Zealand
GN Hearing New Zealand Limited Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna, Auckland, 0622
Tel.: (free) 0800 900 126
beltone.com

Beltone


Technical Specifications

		LP		MP		
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015 IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015 IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	41	32	46	37	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	63 54	53 46	69 60	58 52	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	123 116	113 108	126 121	116 114	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.6 0.6 0.5	0.5 0.2 0.4	0.8 1.3 0.8	0.6 0.6 0.7	%
Telecoil sensitivity (1 mA/m input)*	Max.	93	83	98	90	dB SPL
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	102	92	107	97	
Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	83	76	89	83	
Equivalent input noise, w/o Noise reduction		21	20	21	20	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	5	7	6	7	dB SPL
Frequency range IEC60118-0:2015**		100-9640	100-9410	100-9560	100-9160	Hz
Battery Lifetime (Battery type Rechargeable)***		30	30	30	30	Hours
Current Drain (Quiescent / Operating) (Model 63-DRW, 64-DRW)		0.81 / 1.03	0.81 / 1.04	0.81 / 0.91	0.81 / 1.04	mA

* Telecoil is only for the IMGx64-DRW models.
** Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.
*** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

Maximum Output (OSPL 90)

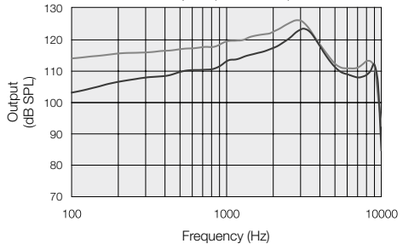


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

Maximum Output (OSPL 90)

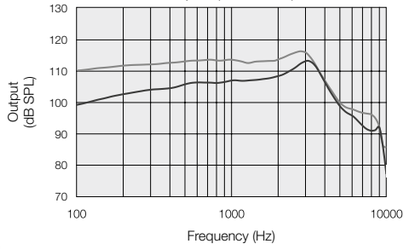





Full-On and Reference Test Gain

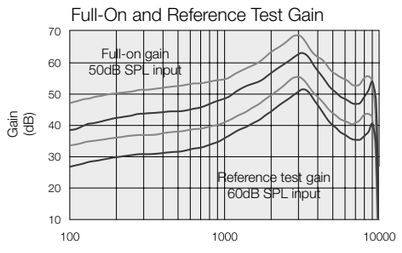


Full-On and Reference Test Gain

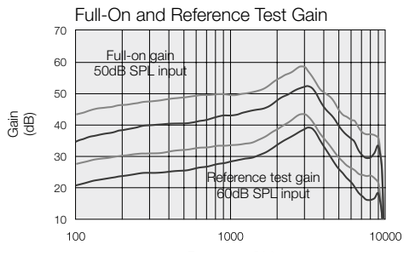

Fitting range

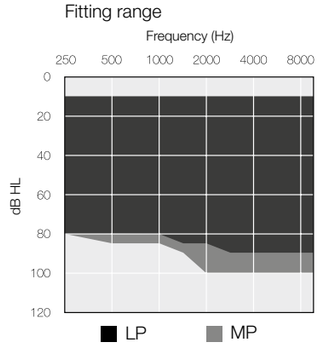

Full-On Telecoil Response
Input level 10 mA/m

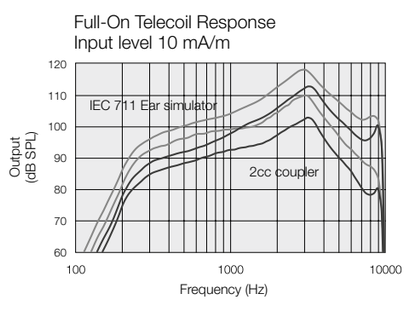

Patents pending

All specifications are subject to change without notice


Technical Specifications

		HP		UP		
		IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015 IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	IEC 60118-0: 1983_AMD1:1994 IEC 60118-0:2015 IEC 711 Ear simulator	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz/HFA	49	40	62	47	dB
Full-on gain (50 dB SPL input)	Max. 1600 Hz/HFA	75 67	65 59	83 81	75 65	dB
Maximum output (90 dB SPL input)	Max. 1600 Hz/HFA	131 124	122 117	138 137	130 124	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.5 0.9 1.0	0.3 0.7 0.7	1.0 2.7 0.2	1.0 1.3 0.1	%
Telecoil sensitivity (1 mA/m input)*	Max.	105	95	114	106	dB SPL
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	109	100	113	108	
Full-on telecoil sensitivity @ 1mA/m	1600 Hz/HFA	96	88	111	95	
Equivalent input noise, w/o Noise reduction		21	20	12	22	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	6	7	7	9	dB SPL
Frequency range IEC60118-0:2015**		100-9320	100-7140	150-5360	100-5010	Hz
Battery Lifetime (Battery type Rechargeable)***		30	30	30	30	Hours
Current Drain (Quiescent / Operating) (Model 63-DRW, 64-DRW)		0.81 / 0.88	0.81 / 1.04	0.81 / 1.01	0.81 / 1.04	mA

* Telecoil is only for the IMGx64-DRW models.
** Measured according to IEC 60118-0:2015, with 711-Ear simulator coupler.
*** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


IEC 60118-0: 1983_AMD1:1994
IEC 711 Ear Simulator

Maximum Output (OSPL 90)

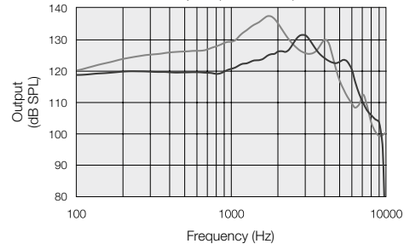


ANSI S3.22-2014
IEC 60118-0:2015
JIS C 5512: 2015
2cc coupler

Maximum Output (OSPL 90)

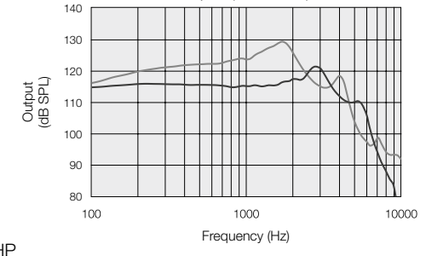





Full-On and Reference Test Gain

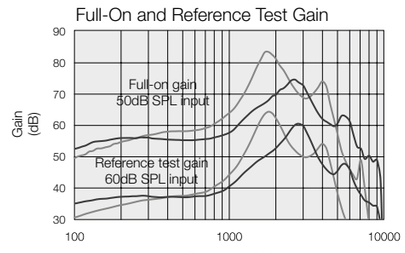


Full-On and Reference Test Gain

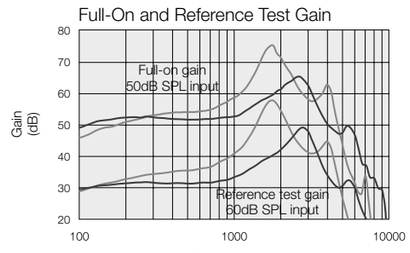

Fitting range

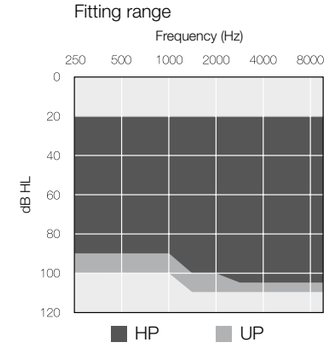

Full-On Telecoil Response
Input level 10 mA/m

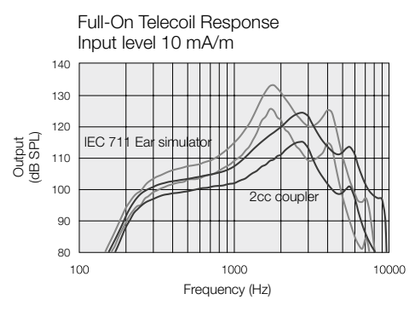

Patents pending

All specifications are subject to change without notice