Danavox Astro PRO

XG CROS Transmitter



Model	XG160S-DRWC
Device Configurations	
Battery size	Rechargeable Lithium-Ion
Receiver Options	LP, MP, HP
Control Options	Push button
IP Classification	IP68
Battery Lifetime (CROS/BiCROS fitting)	16 (typ) hours
Audiological Features	
Soft Switching	●
Adaptive Autoscope	●
Fixed Directionality	●
Omni	●
Noise Reduction Settings	Paired hearing aid options
CROS balance control	●
Connectivity Features	
Wireless accessory and direct streaming	Paired hearing aid options
Wireless fitting with NoahLink Wireless	●



Desktop charger
Charging form factor (CFF) 8



Standard charger
Charging form factor (CFF) 8



Premium charger
Charging form factor (CFF) 8

Made for iPhone | iPad | iPod

Works with Android

© 2025 GN Hearing A/S. All rights reserved. DANAVOX is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
Android is a trademark of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

403040000GB-25.01-Rev.A

GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com

GN Hearing India Private Limited,
NMS TITANIUM
4th Floor, Office No 401-408,
Plot No. 74, Sector No.15,
CBD Belapur,
Navi Mumbai - 400614

DANAVOX GN


DANAVOX GN


Technical Specifications

		LP	MP	
		ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	31	36	dB
Full-on gain (50 dB SPL input)	Max. HFA	56 50	60 55	dB
Maximum output (90 dB SPL input)	Max. HFA	113 109	115 113	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.6 0.8 1.4	0.7 0.9 1.3	%
Equivalent input noise, w/o Noise reduction		22	20	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	8	9	dB SPL
Frequency range		<200 - >8000	<200 - >8000	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

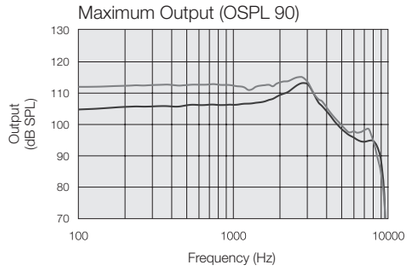

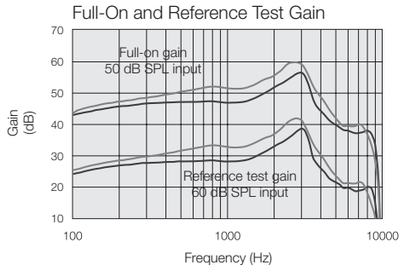

LP
MP

All specifications are subject to change without notice.

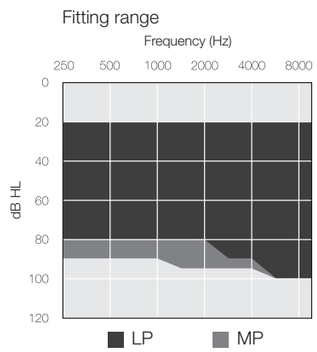



Technical Specifications

		HP
		ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler
Reference test gain (60 dB SPL input)	HFA	41
Full-on gain (50 dB SPL input)	Max. HFA	60 54
Maximum output (90 dB SPL input)	Max. HFA	120 118
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.5 0.8 0.8
Equivalent input noise, w/o Noise reduction		21
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	9
Frequency range		<200 - 6590
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.

Patents pending.

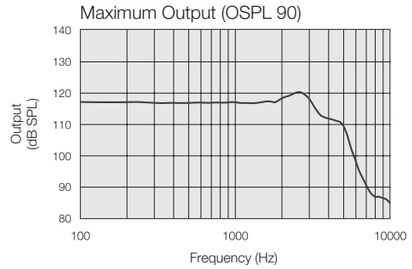

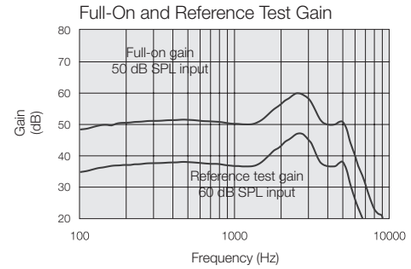

HP

All specifications are subject to change without notice.

