Danavox Astro™ Core

XH



XH60-DRWC XH61-DRW XH62-DRW

Model (Standard Receiver)	XH460-DRWC* XH461-DRW* XH462-DRW*	XH360-DRWC XH361-DRW XH362-DRW	XH260-DRWC XH261-DRW XH262-DRW
Device Configurations			
Battery size 60-DRWC	Rechargeable Lithium-Ion		
Battery size 61-DRW	312 Zinc-Air		
Battery size 62-DRW	13 Zinc-Air		
Receiver Options	LP, MP, HP, UP		
Control Options	Push button (61-DRW and 60-DRWC), Multi-Function button (62), Telecoil (62)		
IP Classification	IP68		
Audiological Features			
Channels	12	12	10
Binaural Directionality III	●	-	-
Spatial Sense	●	-	-
Autoscope Adaptive Directionality (w/Adjustable Directional Mix)	●	●	-
Adjustable Directional Mix	●	●	-
Sychronised Soft Switching	●	●	●
Streaming Bass Boost	2 Settings	1 Setting	1 Setting
Fixed Directionality	●	●	●
Environmental Optimizer I	●	-	-
Noise Tracker II	2 Settings	1 Setting	1 Setting
Wind Guard	2 Settings	1 Setting	1 Setting
Impulse Noise Reduction	2 Settings	1 Setting	-
Expansion	2 Settings	1 Setting	1 Setting
Sound Shaper	●	●	●
DFS Ultra III (w/Music Mode)**	●	●	●
Synchronised Acceptance Manager	●	●	●
Tinnitus Sound Generator	●	●	●
Functional Features			
Ear-to-Ear Communication	●	●	●
Bluetooth® Auracast™	●	●	●
Direct audio streaming (compatible iOS*** and Android™ devices)	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●
BeMore app	●	●	●
Online Services			
Remote Fine Tuning	●	●	●
Live Assist	●	●	●
Remote Firmware Updates	●	●	●
Fitting Features			
Fitting Software XE BeMore 2.1 or higher	●	●	●
Fully Flexible Programs	4	4	4
Datalogging	●	●	●
Wireless fitting with Noahlink Wireless	●	●	●
Automatic Receiver Detection	●	●	●

* XHX60-DRWC, XHX61-DRW, and XHX62-DRW models have the capability to change the feature set from the highest level to the other price points for demo purposes.

** Music Mode only available in XH 4.

*** MFi supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later.



Desktop charger
Charging form factor (CFF) 9



Premium charger
Charging form factor (CFF) 9

Made for iPhone | iPad

Works with Android

© 2026 GN Hearing A/S. All rights reserved. DANAVOX is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Android, Google Play and the Google Play logo are trademarks of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The Auracast word mark and logos are trademarks owned by Bluetooth SIG, Inc.

DANAVOX GN

4030380000GB-26.10-Rev.B

GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com

GN Hearing India Private Limited,
NMS TITANIUM
4th Floor, Office No 401-408,
Plot No. 74, Sector No.15,
CBD Belapur,
Navi Mumbai - 400614

DANAVOX GN

Technical Specifications


		LP	MP	
		ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	31	36	dB
Full-on gain (50 dB SPL input)	Max. HFA	56 50	60 55	dB
Maximum output (90 dB SPL input)	Max. HFA	113 109	115 113	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.6 0.8 1.4	0.7 0.9 1.3	%
Telecoil sensitivity (10 mA/m input)*	Max.	107	110	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	92	97	dB SPL
Full-on telecoil sensitivity @ 1mA/m	HFA	81	86	
Equivalent input noise, w/o Noise reduction		22	20	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	8	9	dB SPL
Frequency range		<200 - >8000	<200 - >8000	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 61-DRW, 62-DRW)		0.81 / 1.03	0.81 / 0.92	mA

* Telecoil is only for the XHX62-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

All specifications are subject to change without notice.

Maximum Output (OSPL 90)

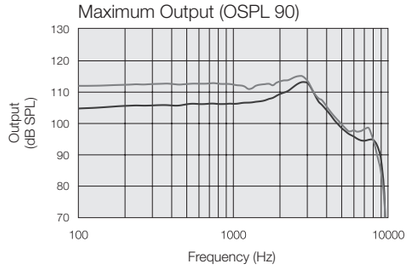


Full-On and Reference Test Gain

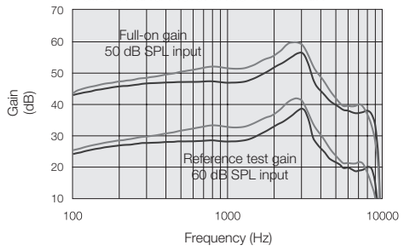


LP
MP

Full-On Telecoil Response*
Input level 10 mA/m

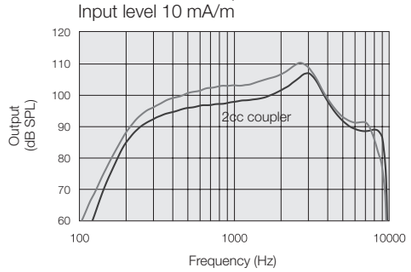

Fitting range



Technical Specifications


		HP	UP	
		ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	41	46	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	71 65	dB
Maximum output (90 dB SPL input)	Max. HFA	120 118	129 123	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz	0.5 0.8 0.8	0.5 0.4 0.1	%
Telecoil sensitivity (10 mA/m input)*	Max.	112	122	
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	103	106	dB SPL
Full-on telecoil sensitivity @ 1mA/m	HFA	86	95	
Equivalent input noise, w/o Noise reduction		21	20	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	9	8	dB SPL
Frequency range		<200 - 6590	<200 - 4650	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 61-DRW, 62-DRW)		0.81 / 0.94	0.81 / 0.87	mA

* Telecoil is only for the XHX62-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

All specifications are subject to change without notice.

Maximum Output (OSPL 90)

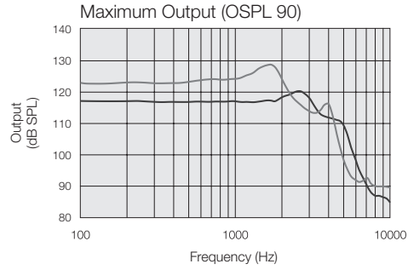


Full-On and Reference Test Gain

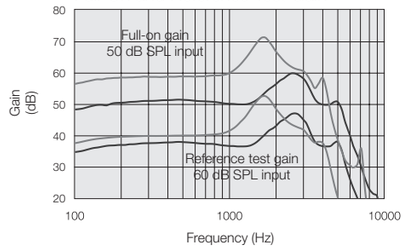

HP
UP

Full-On Telecoil Response*
Input level 10 mA/m

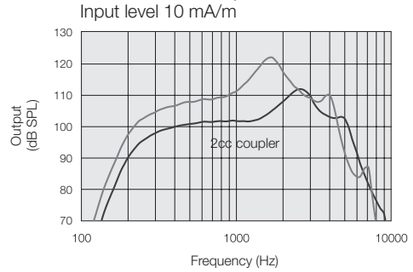

Fitting range

