Danavox Vega™

XJ



XJ60S-DRWC XJ61-DRW XJ62-DRW

Model (Standard Receiver)	XJ960S-DRWC* XJ961-DRW* XJ962-DRW*	XJ760S-DRWC XJ761-DRW XJ762-DRW	XJ560S-DRWC XJ561-DRW XJ562-DRW	XJ460S-DRWC XJ461-DRW XJ462-DRW
Device Configurations				
Battery size 60S-DRWC	Rechargeable Lithium-Ion			
Battery size 61-DRW	312 Zinc-Air			
Battery size 62-DRW	13 Zinc-Air			
Receiver Options	LP, MP, HP, UP			
Control Options	TapControl (60S-DRWC), Push button (61-DRW and 60S-DRWC), Multi-Function button (62), Telecoil (62)			
IP Classification	IP68			
Audiological Features				
Channels	17	14	12	12
Intelligent All-Around**	●	-	-	-
360 All-Around	●	●	-	-
All Access Directionality	-	-	●	-
Binaural Directionality III	-	-	-	●
Intelligent Focus**	●	●	-	-
Clear Focus***	●	●	-	-
Front Focus	-	-	●	-
Ultra Focus	-	-	-	●
Spatial Sense	●	●	●	●
Autoscope Adaptive Directionality (w/Adjustable Directional Mix)	●	●	●	●
Synchronised Soft Switching	●	●	●	●
Streaming Bass Boost	3 Settings	3 Settings	2 Settings	2 Settings
Environmental Optimizer II	●	-	-	-
Environmental Optimizer I	-	●	●	●
Intelligent Noise Tracker**	3 Settings	On/Off	-	-
Noise Tracker II	5 Settings	4 Settings	3 Settings	2 Settings
Wind Guard	3 Settings	3 Settings	2 Settings	2 Settings
Impulse Noise Reduction	3 Settings	3 Settings	2 Settings	2 Settings
Expansion	3 Settings	3 Settings	2 Settings	2 Settings
Sound Shaper	●	●	●	●
DFS Ultra III (w/Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
Functional Features				
Ear-to-Ear Communication	●	●	●	●
MultiConnect**	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS**** and Android™ devices)	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●
BeMore app	●	●	●	●
Sound Enhancer (BeMore app)	●	-	-	-
Online Services				
Remote Fine Tuning	●	●	●	●
Live Assist	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Fitting Software XE BeMore 2.4 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Datalogging	●	●	●	●
Wireless fitting with Noahlink Wireless	●	●	●	●
Automatic Receiver Detection	●	●	●	●

* XJX60S-DRWC, XJX61-DRW, and XJX62-DRW models have the capability to change the feature set from the highest level to the other price points for demo purposes.

** Intelligent All-Around, Intelligent Noise Tracker, Intelligent Focus, and MultiConnect are only available in the 60S model.

*** Clear Focus only available for the 61 and 62 models.

**** Hands-free calls are compatible with iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation), iPad (10th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later.

DANAVOX GN



Desktop charger
Charging form factor (CFF) 8



Standard charger
Charging form factor (CFF) 8



Premium charger
Charging form factor (CFF) 8

Made for iPhone | iPad Works with Android

© 2026 GN Hearing A/S. All rights reserved. DANAVOX is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
App Store is a service mark of Apple Inc., registered in the U.S. and other countries. Android, Google Play and the Google Play logo are trademarks of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The Auracast word mark and logos are trademarks owned by Bluetooth SIG, Inc.

4036480000GB-26.06-Rev.A

GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com

GN Hearing India Private Limited,
NMS TITANIUM
4th Floor, Office No 401-408,
Plot No. 74, Sector No.15,
CBD Belapur,
Navi Mumbai - 400614

DANAVOX GN

Technical Specifications


		LP ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	MP ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	31	36	dB
Full-on gain (50 dB SPL input)	Max. HFA	56 50	60 55	dB
Maximum output (90 dB SPL input)	Max. HFA	113 109	115 113	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.6 0.8 1.4 0.6	0.7 0.9 1.3 0.6	%
Full-on SPLIV @ 10mA/m* HFA - SPLIV @ 31.6 mA/m Full-on HFA-SPLIV @ 10mA/m	Max. HFA HFA	107 92 101	110 97 106	dB SPL
Equivalent input noise, w/o Noise reduction	HFA	22	20	dB SPL
Frequency range		≤200 - ≥8000	≤200 - ≥8000	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 61-DRW, 62-DRW)		0.81 / 1.03	0.81 / 0.92	mA

* Telecoil is only for the XJX62-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

All specifications are subject to change without notice.

Maximum Output (OSPL 90)

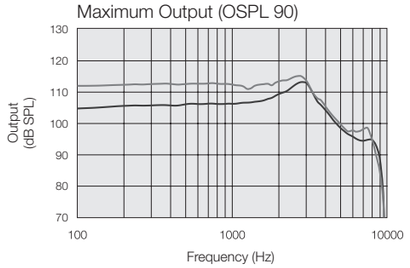


Full-On and Reference Test Gain

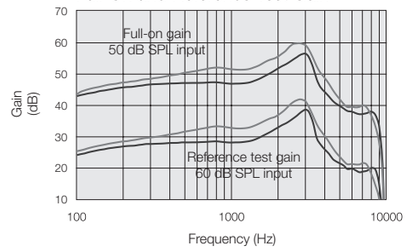


LP
MP

Full-On Telecoil Response*
Input level 10 mA/m

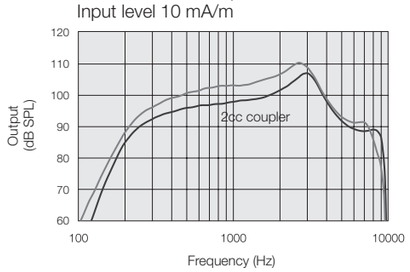

Fitting range



* Telecoil is only for the XJX62-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.

Technical Specifications


		HP ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	UP ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	41	46	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	71 65	dB
Maximum output (90 dB SPL input)	Max. HFA	120 118	129 123	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.5 0.8 0.8 0.4	0.5 0.4 0.1 0.1	%
Full-on SPLIV @ 10mA/m* HFA - SPLIV @ 31.6 mA/m Full-on HFA-SPLIV @ 10mA/m	Max. HFA HFA	112 103 106	122 106 115	dB SPL
Equivalent input noise, w/o Noise reduction	HFA	21	20	dB SPL
Frequency range		≤200 - 6590	≤200 - 4650	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 61-DRW, 62-DRW)		0.81 / 0.94	0.81 / 0.87	mA

* Telecoil is only for the XJX62-DRW models.
** Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.
Maximum number includes no streaming; typical number includes several hours of streaming.


Patents pending.

All specifications are subject to change without notice.

Maximum Output (OSPL 90)

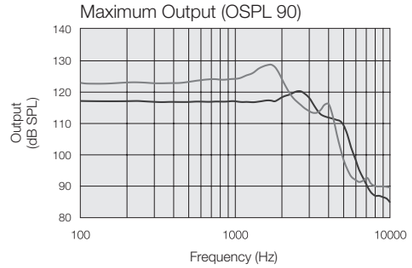


Full-On and Reference Test Gain

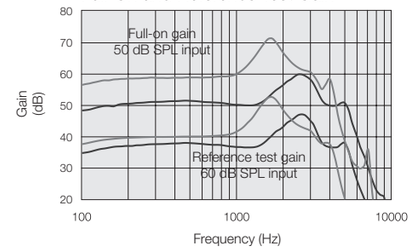

HP
UP

Full-On Telecoil Response*
Input level 10 mA/m

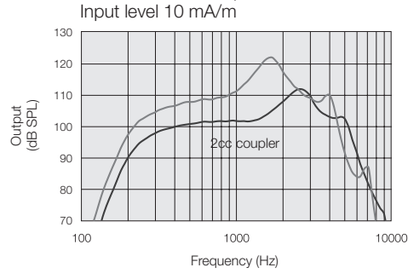

Fitting range

