Danavox Vega™

XJ



ITC

Model*	XJ9ITC-DW	XJ7ITC-DW	XJ5ITC-DW	XJ4ITC-DW
Device Configurations				
Battery	312			
Control options	Push button and Volume Control			
Receiver options	LP, MP, HP, UP			
IP Classification	IP68			
Audiological Features				
Channels	17	14	12	12
Autoscope Adaptive Directionality	●	–	–	–
Adjustable directional mix	●	–	–	–
Multiscope Adaptive Directionality	–	●	–	–
Adaptive directionality	–	–	●	●
Soft Switching	●	●	●	●
Streaming Bass Boost	3 settings	3 settings	2 settings	2 settings
Environmental Optimiser II	●	–	–	–
Environmental Optimiser I	–	●	●	●
Noise Tracker II	5 settings	4 settings	3 settings	2 settings
Expansion	3 settings	3 settings	2 settings	2 settings
Impulse Noise Reduction	3 settings	3 settings	2 settings	2 settings
Wind Guard	3 settings	3 settings	2 settings	2 settings
Sound Shaper	●	●	●	●
DFS Ultra III (w/ Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Low Frequency Boost**	●	●	●	●
Amplification Strategy (WDRC/Semi-Linear/Linear)**	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
Functional Features				
Ear to Ear Communication (Controls only)	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS and Android™ devices)	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●
BeMore app	●	●	●	●
Sound Enhancer (BeMore app)	●	–	–	–
Online Services				
Remote Fine Tuning	●	●	●	●
Live Assist	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Fitting Software XE BeMore 2.4 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Auto DFS	●	●	●	●
Datalogging	●	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●	●

* Availability of models may vary by country.

** Only available for UP receiver.

DANAVOX GN

Made for iPhone | iPad | iPod

Works with Android

© 2026 GN Hearing A/S. All rights reserved. DANAVOX is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
Android is a trademark of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.
The Auracast word mark is a trademark owned by Bluetooth SIG, Inc.

4032900000GB-26.08-Rev.B

GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com


GN Hearing India Private Limited,
NMS TITANIUM
4th Floor, Office No 401-408,
Plot No. 74, Sector No.15,
CBD Belapur,
Navi Mumbai - 400614

DANAVOX GN


Technical Specifications

		LP	MP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	31	36	dB
Full-on gain (50 dB SPL input)	Max. HFA	40 37	50 45	dB
Maximum output (90 dB SPL input)	Max. HFA	113 108	115 113	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	1.3 1.3 1.0 0.2	0.6 0.8 0.5 0.2	%
Equivalent input noise		23	23	dB SPL
Frequency range		≤200 - ≥8000	≤200 - ≥8000	Hz
Current Drain (Quiescent / Operating) (Battery type 312)		0.75 / 0.95	0.78 / 1.05	mA

Maximum Output (OSPL 90)

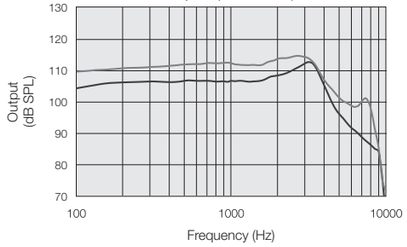


Full-On and Reference Test Gain

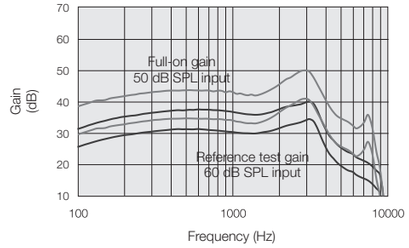



Fitting range




Patents pending.

All specifications are subject to change without notice.


Technical Specifications

		HP	UP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	41	46	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	68 61	dB
Maximum output (90 dB SPL input)	Max. HFA	120 118	128 123	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.6 1.1 0.2 0.1	0.3 0.6 0.2 0.0	%
Equivalent input noise		23	23	dB SPL
Frequency range		≤200 - 6980	≤200 - 5350	Hz
Current Drain (Quiescent / Operating) (Battery type 312)		0.75 / 1.01	0.78 / 0.91	mA

Maximum Output (OSPL 90)

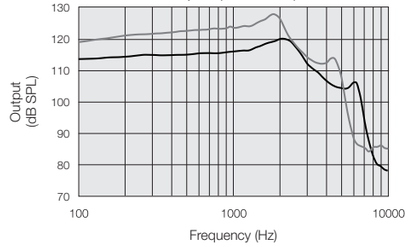


Full-On and Reference Test Gain

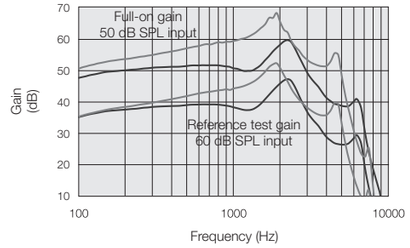



Fitting range



Patents pending.

All specifications are subject to change without notice.