Danavox Vega™

XJ



ITE

Model*	XJ9ITE-DWC	XJ7ITE-DWC	XJ5ITE-DWC	XJ4ITE-DWC
Device Configurations				
Battery	Rechargeable Lithium-Ion			
Control options	Push button			
Receiver options	MP, HP, UP			
IP Classification	IP68			
Audiological Features				
Channels	17	14	12	12
360 All-Around	●	●	–	–
All Access Directionality	–	–	●	–
Binaural Directionality III	–	–	–	●
Spatial Sense	●	●	●	●
Clear Focus	●	●	–	–
Front Focus	–	–	●	–
Ultra Focus	–	–	–	●
Synchronised Soft Switching	●	●	●	●
Streaming Bass Boost	3 settings	3 settings	2 settings	2 settings
Environmental Optimiser II	●	–	–	–
Environmental Optimiser I	–	●	●	●
Noise Tracker II	5 settings	4 settings	3 settings	2 settings
Expansion	3 settings	3 settings	2 settings	2 settings
Impulse Noise Reduction	3 settings	3 settings	2 settings	2 settings
Wind Guard	3 settings	3 settings	2 settings	2 settings
Sound Shaper	●	●	●	●
DFS Ultra III (w/ Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Low Frequency Boost**	●	●	●	●
Amplification Strategy (WDRC/Semi-Linear/Linear)**	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
Functional Features				
Ear to Ear Communication	●	●	●	●
MultiConnect	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS*** and Android™ devices)	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●
BeMore app	●	●	●	●
Sound Enhancer (BeMore app)	●	–	–	–
Online Services				
Remote Fine Tuning	●	●	●	●
Live Assist	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Fitting Software XE BeMore 2.4 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Auto DFS	●	●	●	●
Datalogging	●	●	●	●
Wireless Fitting with Noahlink Wireless	●	●	●	●

* Availability of models may vary by country.

** Only available for UP receiver.

*** MFi supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation), iPad (10th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later.



Custom charger
Charging form factor (CFF) Custom (C)

Made for iPhone | iPad | iPod

Works with Android

© 2026 GN Hearing A/S. All rights reserved. DANAVOX is a trademark of GN Hearing A/S.
Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
Android is a trademark of Google LLC.
The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.
The Auracast word mark is a trademark owned by Bluetooth SIG, Inc.

DANAVOX GN

4032880000GB-26.08-Rev.B

GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com

GN Hearing India Private Limited,
NMS TITANIUM
4th Floor, Office No 401-408,
Plot No. 74, Sector No.15,
CBD Belapur,
Navi Mumbai - 400614


DANAVOX GN

Technical Specifications


		MP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	38	dB
Full-on gain (50 dB SPL input)	Max. HFA	50 45	dB
Maximum output (90 dB SPL input)	Max. HFA	118 114	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.6 0.6 0.7 0.3	%
Equivalent input noise		22	dB SPL
Frequency range		≤200 - ≥8000	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	Hours

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.


Maximum Output (OSPL 90)

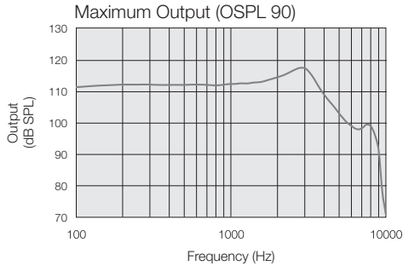

Full-On and Reference Test Gain

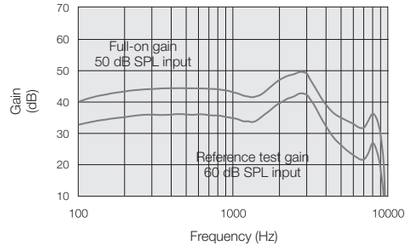

Fitting range



Patents pending.


All specifications are subject to change without notice.

Technical Specifications


		HP	UP	
		ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	ANSI S3.22-2014 IEC 60118-0:2022 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	41	48	dB
Full-on gain (50 dB SPL input)	Max. HFA	60 54	70 63	dB
Maximum output (90 dB SPL input)	Max. HFA	121 119	130 125	dB SPL
Total harmonic distortion	500 Hz 800 Hz 1600 Hz 3200 Hz	0.5 0.6 0.8 0.2	0.6 0.6 0.2 0.1	%
Equivalent input noise		23	21	dB SPL
Frequency range		≤200 - 7740	≤200 - 5770	Hz
Battery Lifetime (Battery type Rechargeable)*		30 (max) 24 (typ)	30 (max) 24 (typ)	Hours

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.

Maximum Output (OSPL 90)

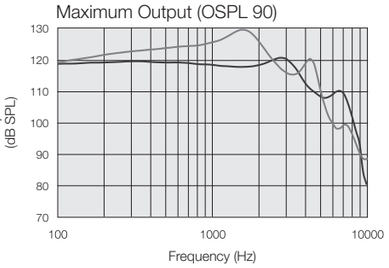


Full-On and Reference Test Gain

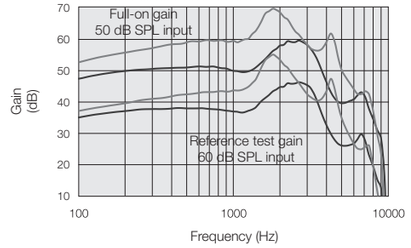



Fitting range

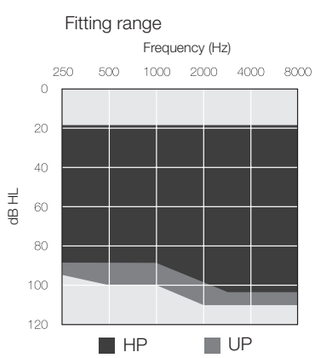

Patents pending.

All specifications are subject to change without notice.